
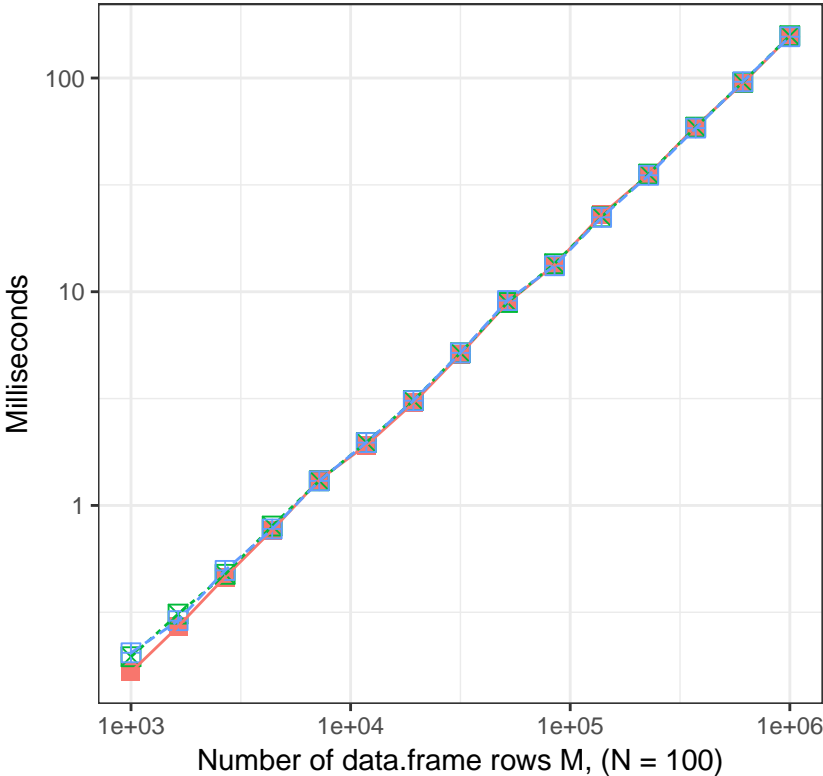


Benchmark timings: mutating all columns ($M \times N$) –sized data.frame

Function: $f(x) = x \cdot 1$ (unit multiplication)

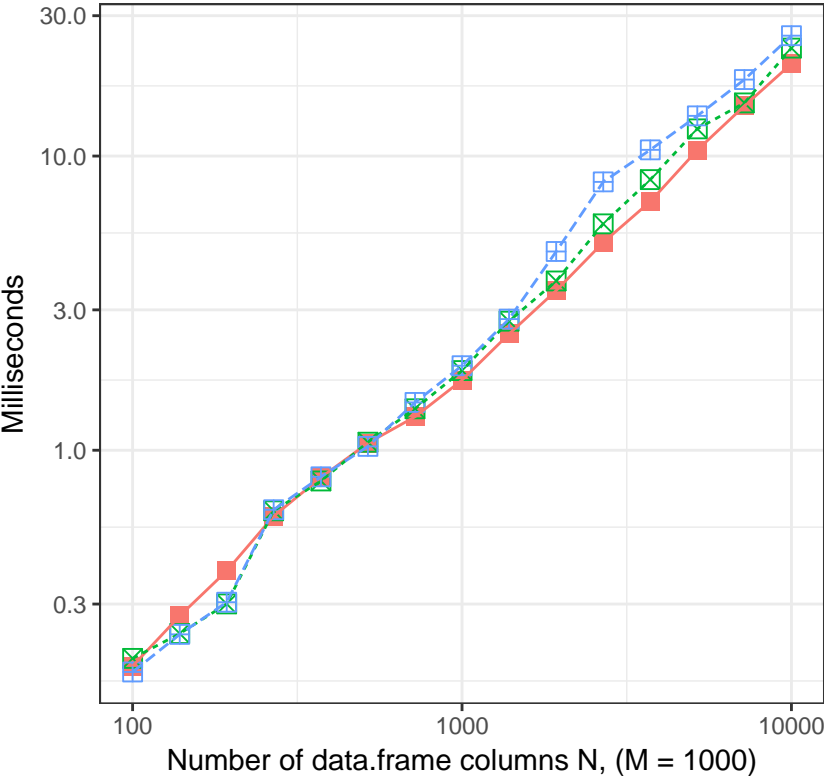

—■— rapplly (how = "replace") -x- rrapplly (how = "replace") -□- rapplly (how = "prune")