

Spe^lAT_EX — Speech-enabled L^AT_EX

Walter Daems (`walter.daems@uantwerpen.be`) and Paul Levrie

v0.94— 2024/11/01

Disclaimer

- ▷ Note that this is an experimental package. Its interface may change considerably over subsequent versions (until v1.0). Note that this is an experimental package. Its interface may change considerably over subsequent versions (until v1.0).

1 Preface ▷

1.1 Background ▷

- ▷ At our institute, the University of Antwerp in Belgium, the number of students with reading and/or writing disorders (or at least aware of these disorders) is increasing. Approximately 5% of the students are registered with such a disorder and the number is rising steadily over the past 10 years. Probably this number is an underestimation as a number of people opt not to register their disorder. At our institute, the University of Antwerp in Belgium, the number of students with reading and/or writing disorders (or at least aware of these disorders) is increasing. Approximately 5% of the students are registered with such a disorder and the number is rising steadily over the past 10 years. Probably this number is an underestimation as a number of people opt not to register their disorder.

- ▷ A large portion of the study materials we offer to students is still written material. The authors believe that this will keep on being so, even given the multimedia and AI options that have become mainstream. Let's not go into this debate for now.

However, written course texts cannot be but suboptimal for students with reading disorders. A large portion of the study materials we offer to students is still written material. The authors believe that this will keep on being so, even given the multimedia and AI options that have become mainstream. Let's not go into this debate for now.

However, written course texts cannot be but suboptimal for students with reading disorders.

- ▷ For small texts, reading them out loud and recording them using a voice recorder to create an aid for our target group, is still feasible. We have taken that in the past for exam assignments. However, for bigger texts (like course syllabi) this is beyond the time a professor can afford spending on this small a group of students. Yes, economic laws also govern teaching! For small texts, reading them out loud

and recording them using a voice recorder to create an aid for our target group, is still feasible. We have taken that in the past for exam assignments. However, for bigger texts (like course syllabi) this is beyond the time a professor can afford spending on this small a group of students. Yes, economic laws also govern teaching!

1.2 State of the art ▷

1.2.1 In general ▷

- ▷ Therefore, reverting to readily available text-to-speech software is an obvious choice. Nowadays, special software exists that provides the functionality of reading out loud the contents of electronic documents, e.g. NVDA [1] or SprintPlus [2]. Moreover, more and more standard PDF readers (such as Acrobat Reader [3] have the facility of performing text-to-speech). For nontechnical subjects, this works fine. However, when it comes to technical course syllabi that are loaded with non-trivial mathematics, the standard text-to-speech packages fail to meet our expectations. In addition, they cannot read a sensible textual description of figures or tables. Therefore, reverting to readily available text-to-speech software is an obvious choice. Nowadays, special software exists that provides the functionality of reading out loud the contents of electronic documents, e.g. NVDA [1] or SprintPlus [2]. Moreover, more and more standard PDF readers (such as Acrobat Reader [3] have the facility of performing text-to-speech). For nontechnical subjects, this works fine. However, when it comes to technical course syllabi that are loaded with non-trivial mathematics, the standard text-to-speech packages fail to meet our expectations. In addition, they cannot read a sensible textual description of figures or tables.
- ▷ The issue with reading mathematics will be solved in the future, by enforcing mathematical equations to follow a specific standard that can be parsed and converted, not only into a visual representation, but also into proper text. MathML will be one of the candidates for that format. The issue with reading mathematics will be solved in the future, by enforcing mathematical equations to follow a specific standard that can be parsed and converted, not only into a visual representation, but also into proper text. MathML will be one of the candidates for that format.
- ▷ The issue with figures and tables can be solved by using the tag infrastructure of PDF. The format provides a system of tags that allow you to provide extra information about the content of a document, in much the same way as you can specify an 'alt' key for an image in HTML. This tag could contain a proper textual description of the figure or the table. The issue with figures and tables can be solved by using the tag infrastructure of PDF. The format provides a system of tags that allow you to provide extra information about the content of a document, in much the same way as you can specify an 'alt' key for an image in HTML. This tag could contain a proper textual description of the figure or the table.

1.2.2 For L^AT_EX

▷

- ▷ Currently, the L^AT_EX project is investing in enabling L^AT_EX to partially automate the tagging of PDFs with the `tagpdf` package [4], such that the user only has to do a minimal job (adding tags for figures and tables). The goal is to maximize the accessibility of L^AT_EX-produced documents. Currently, the L^AT_EX project is investing in enabling L^AT_EX to partially automate the tagging of PDFs with the `tagpdf` package [4], such that the user only has to do a minimal job (adding tags for figures and tables). The goal is to maximize the accessibility of L^AT_EX-produced documents.
- ▷ So all is well? Not quite. Though we are confident that — with enough time — the community will solve the issue completely, there are still some gaps: So all is well? Not quite. Though we are confident that — with enough time — the community will solve the issue completely, there are still some gaps:
 - ▷ The `tagpdf` package is still not a part of the mainstream L^AT_EX-kernel.
 - ▷ MathML reading support in PDF readers is still in its infancy.
 - ▷ Many PDF readers do not fully support tags yet.

1.3 This package

▷

- ▷ This package aims to overcome these problems in the meantime and also to contribute to the longterm goal: making perfectly tagged PDFs that are read by any PDF-reader. This package aims to overcome these problems in the meantime and also to contribute to the longterm goal: making perfectly tagged PDFs that are read by any PDF-reader.
- ▷ In the *first phase* of this package (i.e. the version you are looking at right now), this package reads your L^AT_EX source, converts the text and the formulas to audio files and equips your PDF with hyperlinks to these files, such that with a few clicks you can listen to your document. The audio files are external files that should be packaged with your PDF to allow a reader to use the document with the available audio. You have the choice to use local files or files that are made available on a server (as holds for this text; the audio files are on the CTAN servers).

How does $S_{pe}L^A T_E X$ read the formulas? It parses your L^AT_EX constructs and makes the best of it. This will probably be the part that might survive up until the very last phase of this package. In the *first phase* of this package (i.e. the version you are looking at right now), this package reads your L^AT_EX source, converts the text and the formulas to audio files and equips your PDF with hyperlinks to these files, such that with a few clicks you can listen to your document. The audio files are external files that should be packaged with your PDF to allow a reader to use the document with the available audio. You have the choice to use local files or files that are made available on a server (as holds for this text; the audio files are on the CTAN servers).

How does $S_{pe}L^A T_E X$ read the formulas? It parses your L^AT_EX constructs and makes the best of it. This will probably be the part that might survive up until the very last phase of this package.

- ▷ In a *second phase* of this package, the audio files will be embedded into the PDF. Currently, there are not enough PDF readers that support this feature. Therefore, we decided to keep using the external audio files for now. In a *second phase* of this package, the audio files will be embedded into the PDF. Currently, there are not enough PDF readers that support this feature. Therefore, we decided to keep using the external audio files for now.
- ▷ In a *third phase*, the audio files *may be* abandoned altogether, fully switching to tags. And we do think that this should be the end goal. The reasons why we say '*may be*', are: In a *third phase*, the audio files *may be* abandoned altogether, fully switching to tags. And we do think that this should be the end goal. The reasons why we say '*may be*', are:
 - ▷ The voices of the current PDF-readers are still not of the same quality as the ones available online. And quality does matter.
 - ▷ The better voices may require cloud access, and probably will not be free, therefore (us) paying for them at document creation time, makes more sense to us than having our students pay for these voices whenever they read the document.
 - ▷ The industry standard Adobe reader is not easily available on open-source operating systems (like UNIX/BSD/Linux-derived platforms). You might consider using emulation using wine [5], but in that case you can forget about audio. Free access to software is something we consider to be a must-have, rather than a nice-to-have.
- ▷ Will $\text{S}_p\text{eL}\text{A}\text{T}\text{E}\text{X}$ become obsolete in the future? Undoubtedly so. But for the time being, it answers our desire to provide our students with good audio support when studying their engineering courses. That is now, not only in five years time. Will $\text{S}_p\text{eL}\text{A}\text{T}\text{E}\text{X}$ become obsolete in the future? Undoubtedly so. But for the time being, it answers our desire to provide our students with good audio support when studying their engineering courses. That is now, not only in five years time.
- ▷ We hope that you enjoy using our software, or that — if you are not pleased with it — it triggers you to give us feedback or to come up with a better solution. We especially would like to thank Ulrike Fischer (of the $\text{L}\text{A}\text{T}\text{E}\text{X}$ -project and the maintainer of the tagpdf package) for trying to use this package and reaching out to give us feedback. One of her suggestions (not to use big hyperlink-areas) was almost instantly implemented and has been adopted as the standard way of linking. We hope that you enjoy using our software, or that — if you are not pleased with it — it triggers you to give us feedback or to come up with a better solution. We especially would like to thank Ulrike Fischer (of the $\text{L}\text{A}\text{T}\text{E}\text{X}$ -project and the maintainer of the tagpdf package) for trying to use this package and reaching out to give us feedback. One of her suggestions (not to use big hyperlink-areas) was almost instantly implemented and has been adopted as the standard way of linking.
- ▷ You are free to use our software but kindly ask you to provide a mention “The audio materials of this text have been prepared with $\text{S}_p\text{eL}\text{A}\text{T}\text{E}\text{X}$ ” in the section treating copyrights, bibliographic data or any other spot of your text that is suited. We’d also welcome a short mail of yours telling that you make use of

the package. The pleasure of receiving such an e-mail makes our day. You are free to use our software but kindly ask you to provide a mention “The audio materials of this text have been prepared with `SpeLATEX`” in the section treating copyrights, bibliographic data or any other spot of your text that is suited. We’d also welcome a short mail of yours telling that you make use of the package. The pleasure of receiving such an e-mail makes our day.

- ▷ You are free to modify this `LATEX`-package, keeping a reference to our original package intact, provided that your package is subject to the LPPL license, as is `SpeLATEX`. However, contributing to our package or to the `LATEX` project in general, might be a better way to go, in order to bundle the efforts for a better speech-enabled `LATEX`. You are free to modify this `LATEX`-package, keeping a reference to our original package intact, provided that your package is subject to the LPPL license, as is `SpeLATEX`. However, contributing to our package or to the `LATEX` project in general, might be a better way to go, in order to bundle the efforts for a better speech-enabled `LATEX`.

2 Introduction ▷

2.1 Target audience ▷

- ▷ `SpeLATEX` is primarily intended for persons with a reading disorder. This may be: `SpeLATEX` is primarily intended for persons with a reading disorder. This may be:

- ▷ persons suffering dyslexia
- ▷ visually impaired persons
 - ▷ persons who still can recognize the basic parts of a book, i.e. are able to operate a PDF viewer and click on the individual parts.
 - ▷ persons who can’t recognize the basic parts of a book (e.g., blind persons): they can listen to the automatic playback of the ordered chain of audio fragments.

- ▷ But also people who want to multitask, e.g., gardening while listening to a technical book, can benefit from `SpeLATEX`.¹

We often use `SpeLATEX` to proofread the texts we’ve written ourselves as we hear language errors more easily than we spot them while reading. But also people who want to multitask, e.g., gardening while listening to a technical book, can benefit from `SpeLATEX`.²

We often use `SpeLATEX` to proofread the texts we’ve written ourselves as we hear language errors more easily than we spot them while reading.

¹Note that multitasking is not reserved for persons without visual impairment. Also visually impaired persons can benefit from listening to an audiobook while doing other things.

²Note that multitasking is not reserved for persons without visual impairment. Also visually impaired persons can benefit from listening to an audiobook while doing other things.

2.2 The magic under the hood ▷

2.2.1 The overall picture ▷

- ▷ $\text{Sp}\epsilon\text{L}\text{A}\text{T}\text{E}\text{X}$ equips the PDF that is generated by $\text{L}\text{A}\text{T}\text{E}\text{X}$ with hyperlinks to audio files that contain the spoken equivalent of the original text, equations, figures and tables. $\text{Sp}\epsilon\text{L}\text{A}\text{T}\text{E}\text{X}$ equips the PDF that is generated by $\text{L}\text{A}\text{T}\text{E}\text{X}$ with hyperlinks to audio files that contain the spoken equivalent of the original text, equations, figures and tables. ▷ Let's start by considering the flow depicted in Fig. 1 at the top of the diagram. Fig. 1 By loading the `spel.sty` package in your source document (`text.tex`), $\text{L}\text{A}\text{T}\text{E}\text{X}$ will produce a PDF file that references audio files that will be generated later (see below). In addition, it generates text chunks (i.e. small portions of your text) in separate files (`.tex`) and a spel index file (`.spelidx`) referencing them in sequence.
- ▷ Together with the `.aux`-file (needed by $\text{Sp}\epsilon\text{L}\text{A}\text{T}\text{E}\text{X}$ for labels and citations), these are the inputs to the $\text{Sp}\epsilon\text{L}\text{A}\text{T}\text{E}\text{X}$ -engine (`spel-wizard.pl`) that parses the text chunks, writes a full text version of them as spel files (with extension `.spel`) and controls the text-to-speech engine to generate audio versions of them.³ Together with the `.aux`-file (needed by $\text{Sp}\epsilon\text{L}\text{A}\text{T}\text{E}\text{X}$ for labels and citations), these are the inputs to the $\text{Sp}\epsilon\text{L}\text{A}\text{T}\text{E}\text{X}$ -engine (`spel-wizard.pl`) that parses the text chunks, writes a full text version of them as spel files (with extension `.spel`) and controls the text-to-speech engine to generate audio versions of them.⁴
- ▷ To avoid excessive text to speech conversion (i.e. an expensive step) the $\text{Sp}\epsilon\text{L}\text{A}\text{T}\text{E}\text{X}$ engine derives an MD5 fingerprint of them and compares it to previously generated fingerprints for the chunk. If the fingerprint has changed, the audio file is overwritten (or created the first time), otherwise it is left untouched. To avoid excessive text to speech conversion (i.e. an expensive step) the $\text{Sp}\epsilon\text{L}\text{A}\text{T}\text{E}\text{X}$ engine derives an MD5 fingerprint of them and compares it to previously generated fingerprints for the chunk. If the fingerprint has changed, the audio file is overwritten (or created the first time), otherwise it is left untouched.
- ▷ As a cherry on top, the $\text{Sp}\epsilon\text{L}\text{A}\text{T}\text{E}\text{X}$ -engine also creates a top-level playlist, such that you may use the audio files for a PODcast-like listening experience. Something that has not been indicated on the figure, is that for reading out loud entire (sub)sections, the PDF-file also references m3u playlists that gather all chunks belonging to the (sub)section. As a cherry on top, the $\text{Sp}\epsilon\text{L}\text{A}\text{T}\text{E}\text{X}$ -engine also creates a top-level playlist, such that you may use the audio files for a PODcast-like listening experience. Something that has not been indicated on the figure, is that for reading out loud entire (sub)sections, the PDF-file also references m3u playlists that gather all chunks belonging to the (sub)section.
- ▷ You might wonder: where are the links? Well, there are three variants: You might wonder: where are the links? Well, there are three variants:
- ▷ *area links*, which are almost exclusively used for equations, tables or figures. These links make an entire rectangle active, linking to the corresponding audio file.

³In the figure, Ogg Vorbis has been chosen as format, but this can be any audio format.

⁴In the figure, Ogg Vorbis has been chosen as format, but this can be any audio format.

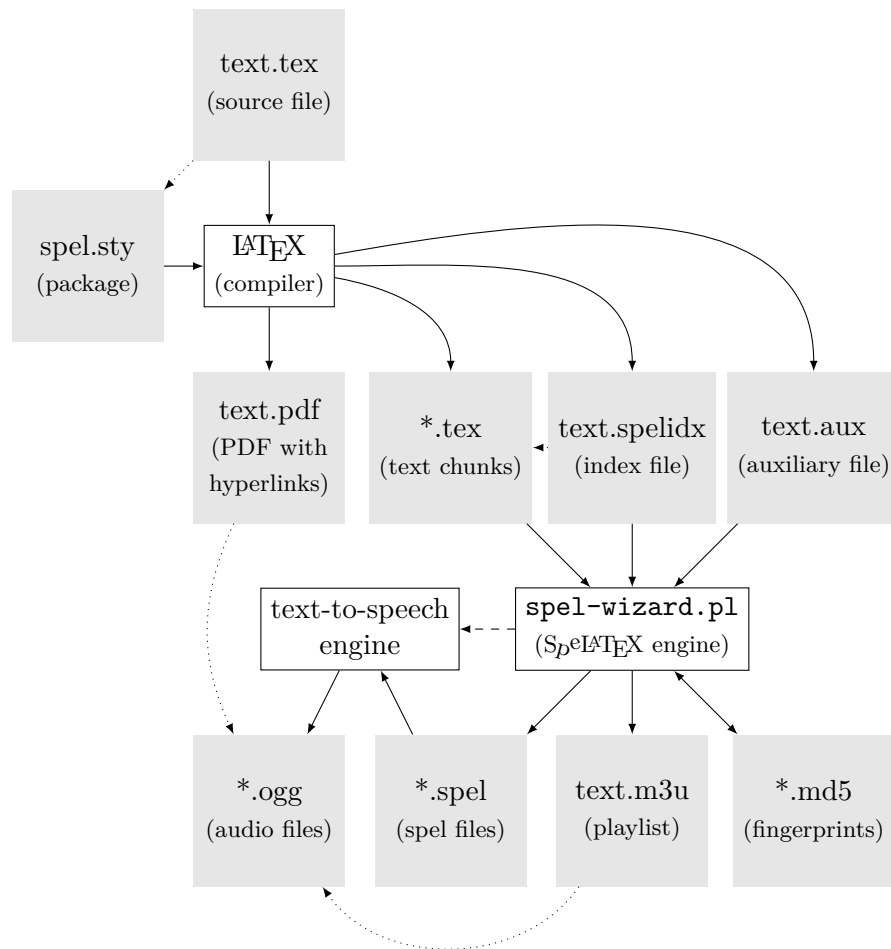


Figure 1: Basic tool setup of the $S_{p^e}lA_{T^e}X$ package; filled boxes indicate files, outlined boxes indicate tools; solid lines indicates use or creation of files, dotted lines indicate references, dashed lines indicate a control relationship.

- *group links*, indicated by small right-pointing triangles next to section headers (on the far right). These cause all blocks in the section to be read one by one.

In case you specify the package option `markervisibility=none` these triangles will become invisible. However, the clickable area still exists. Try!

- *chunk links*, before every paragraph, footnote or list, a small triangle indicates a clickable link.

If you activate the package option `markervisibility=onlygroups`, they will become invisible, but still clickable. Try it! Once you are aware that these regions are active, you'll find them easily. Not using the full paragraph as an active region, allows existing hyperlinks (like for citations, references or URLs) to still function.

2.2.2 Implicit spelchunks ▷

- ▷ Generating the text chunks to be read out loud requires us to use special \LaTeX -macros. For all pieces of text that are within an existing macro (e.g. `\title`, `\author`, `\section`, `\footnote`, `\thanks`), these macros have been redefined by the `Spe \LaTeX` -package to execute the magic without any further hassle. We call these \LaTeX -fragments *implicit spelchunks*. Generating the text chunks to be read out loud requires us to use special \LaTeX -macros. For all pieces of text that are within an existing macro (e.g. `\title`, `\author`, `\section`, `\footnote`, `\thanks`), these macros have been redefined by the `Spe \LaTeX` -package to execute the magic without any further hassle.

We call these \LaTeX -fragments *implicit spelchunks*.

- ▷ However, not all \LaTeX -constructs can be dealt with in an automatic way. This is true for any `\item` you put inside a list. You need to replace that with a `\spelitem` that takes the text that follows as a first explicit argument, i.e. `\item blabla` should be replaced by `\spelitem {blabla}`. The same holds for any `\caption`. Too many packages (like `subcaption/subfigure`) redefine captions, so I chose to stay out of their way. Therefore every `\caption` must be replaced by a `\spelcaption`. However, not all \LaTeX -constructs can be dealt with in an automatic way. This is true for any `\item` you put inside a list. You need to replace that with a `\spelitem` that takes the text that follows as a first explicit argument, i.e. `\item blabla` should be replaced by `\spelitem {blabla}`. The same holds for any `\caption`. Too many packages (like `subcaption/subfigure`) redefine captions, so I chose to stay out of their way. Therefore every `\caption` must be replaced by a `\spelcaption`. ▷ We call these \LaTeX -fragments *defunct implicit spelchunks*. They should have been implicit, but we could not get that to work without problems. Therefore you need to mark them explicitly as `\spelitem` constructs. We call these \LaTeX -fragments *defunct implicit spelchunks*. They should have been implicit, but we could not get that to work without problems. Therefore you need to mark them explicitly as `\spelitem` constructs.

2.2.3 Explicit spelchunks ▷

- ▷ One would hope that `displaymath` environments are also implicit spelchunks. However, overriding environments in \LaTeX is a tricky business. In view of

this, the `SpeLATEX` package keeps away from this, and we've chosen to treat `displaymath` environments (like `equation`, `eqnarray`, `gather`, `align`, `alignat`) the same way as tables or figures, i.e. you need to embed the in a `spelchunk` environment. The only difference between math environments and figures an tables is that `displaymath` environments can be automatically read out loud by the `spel-wizard.pl` script, while you will have to provide a text description for tables and figures manually, using a subsequence `spelchunkad` environment (the suffix `ad` stands for *audio description*). One would hope that `displaymath` environments are also implicit `spelchunks`. However, overriding environments in `LATEX` is a tricky business. In view of this, the `SpeLATEX` package keeps away from this, and we've chosen to treat `displaymath` environments (like `equation`, `eqnarray`, `gather`, `align`, `alignat`) the same way as tables or figures, i.e. you need to embed the in a `spelchunk` environment. The only difference between math environments and figures an tables is that `displaymath` environments can be automatically read out loud by the `spel-wizard.pl` script, while you will have to provide a text description for tables and figures manually, using a subsequence `spelchunkad` environment (the suffix `ad` stands for *audio description*).

- ▷ To keep the terminology clear, we label them as automatic and manual explicit `spelchunks` respectively: To keep the terminology clear, we label them as automatic and manual explicit `spelchunks` respectively:

- ▷ automatic: `equation`, `eqnarray`, `gather`, `align`, `alignat`, ...
- ▷ manual: `figure`, `table`, `tikzpicture`, ...

- ▷ The similarity between both categories is that you both embed them in a `spelchunk` environment, but that you provide the manual textual description using a `spelchunkad` environment right after the chunk for the manual ones: in this way, the `spelchunkad` environment provides an alternative text for the chunk. Note that this way of working also enables you to provide an overriding text for an automatic `spelchunk`, e.g., an equation, if you think that `spel-wizard.pl` is doing a bad job. You do us a favor if you submit this subpar behavior as a bug report to us! The similarity between both categories is that you both embed them in a `spelchunk` environment, but that you provide the manual textual description using a `spelchunkad` environment right after the chunk for the manual ones: in this way, the `spelchunkad` environment provides an alternative text for the chunk. Note that this way of working also enables you to provide an overriding text for an automatic `spelchunk`, e.g., an equation, if you think that `spel-wizard.pl` is doing a bad job. You do us a favor if you submit this subpar behavior as a bug report to us!

- ▷ It is worthwhile to make good descriptions for a figure or a table. It's here that you can create true added value to your manuscript, even for readers without impairment! It is worthwhile to make good descriptions for a figure or a table. It's here that you can create true added value to your manuscript, even for readers without impairment!

2.2.4 Paragraphs ▷

- ▷ However, there is the elephant in the room that we did not yet talk about, the paragraph. Indeed, it is desirable to split plain text according to the paragraphs

in the document. Alas, paragraphs are one of the silent features that are not easily accessible from within a \LaTeX -package. Therefore paragraphs (or smaller text chunks) are considered to be explicit spelchunks and need to be embedded in `spelchunk` environments. This environment will cause its contents to be hyperlinked to a separate piece of audio. However, there is the elephant in the room that we did not yet talk about, the paragraph. Indeed, it is desirable to split plain text according to the paragraphs in the document. Alas, paragraphs are one of the silent features that are not easily accessible from within a \LaTeX -package. Therefore paragraphs (or smaller text chunks) are considered to be explicit spelchunks and need to be embedded in `spelchunk` environments. This environment will cause its contents to be hyperlinked to a separate piece of audio.

- ▷ Encasing all your paragraphs with `spelchunk` environments manually is a pain. There is a reason why in \LaTeX paragraphs can be created by a double newline: convenience. The `spelchunk`-environment encasing ruins this totally! Encasing all your paragraphs with `spelchunk` environments manually is a pain. There is a reason why in \LaTeX paragraphs can be created by a double newline: convenience. The `spelchunk`-environment encasing ruins this totally! ▷ To ease the pain and in order to avoid the visual intrusiveness of the spelchunk environments, you can also use the `\<<<{}` command to encase your paragraphs. In some cases the `\<<<{}` command will not work, e.g., if there is a `Verbatim` environment inside. In that case you must use the `spelchunk` environment directly. To ease the pain and in order to avoid the visual intrusiveness of the spelchunk environments, you can also use the `\<<<{}` command to encase your paragraphs. In some cases the `\<<<{}` command will not work, e.g., if there is a `Verbatim` environment inside. In that case you must use the `spelchunk` environment directly.

2.3 Extra math commands ▷

- ▷ Some of the ways to specify mathematical expressions in \LaTeX is very liberal, what makes converting them to text quite difficult. Therefore, we also provide some extra constructs that make life easier for both parties: you as a user and `spel-wizard.pl` as a parser. Some of the ways to specify mathematical expressions in \LaTeX is very liberal, what makes converting them to text quite difficult. Therefore, we also provide some extra constructs that make life easier for both parties: you as a user and `spel-wizard.pl` as a parser.
- ▷ An example of this are sets. We provide two commands to define a set. As we want these commands to blend in with general \LaTeX , we did not equip them with a prefix `spel`. Therefore, we made activating them conditional to specifying the package option `extramath`. An example of this are sets. We provide two commands to define a set. As we want these commands to blend in with general \LaTeX , we did not equip them with a prefix `spel`. Therefore, we made activating them conditional to specifying the package option `extramath`.

`\setenum` ▷ a command to define a set that consists of comma or semicolon separated elements

`\setdesc` ▷ a command to define a set that is specified using a description

2.4 Added value ▷

- ▷ Why would it make sense to use $\text{S}_p\text{eL}\text{A}\text{T}\text{E}\text{X}$? We think there are many selling points. We can mention a few: Why would it make sense to use $\text{S}_p\text{eL}\text{A}\text{T}\text{E}\text{X}$? We think there are many selling points. We can mention a few:

Free for the content provider▷ If you are using a freeware text-to-speech engine (like for example festival [8] or balabolka [9]) and a royalty-free audio format and player (like for example ogg-vorbis), generating audio-enabled documents only requires the effort of preparing your manuscript. There are no license costs involved.

You could also consider to use an online paying text-to-speech service. As an example, we incorporated a connection to Amazon’s Polly [11]. We admit, it’s not free, but it doesn’t cost an arm and a leg either.

In addition, if your user has a better-quality (maybe commercial) text-to-speech system, he/she can reconvert the text files him-/herself, equipping your document with a voice they like and are used to, without you having to worry about license costs. They might even use an AI-generated copy of their own voice!

Free for your audience▷ In addition, the user of your audio-enabled document doesn’t need to buy a license for text-to-speech software. Only a PDF-viewer and a standard audio-player program are required.

Math capable▷ Try some of the equations in this manuscript in section 6. We are quite confident you’ll be convinced fairly soon.

3 Installation ▷

3.1 The $\text{S}_p\text{eL}\text{A}\text{T}\text{E}\text{X}$ package ▷

- ▷ If you are a package manager then you’ll know how to prepare an installation package for $\text{S}_p\text{eL}\text{A}\text{T}\text{E}\text{X}$. If you are a package manager then you’ll know how to prepare an installation package for $\text{S}_p\text{eL}\text{A}\text{T}\text{E}\text{X}$.

- ▷ If you are a normal user, check if there is a package that your favorite $\text{L}\text{A}\text{T}\text{E}\text{X}$ distributor has prepared for you. Most of the major distributions (like e.g. Tex Live or MikTeX) do so.

The fallback option is to grab the `spelatex.sty` file from CTAN and put it in our TEX search path. If you are a normal user, check if there is a package that your favorite $\text{L}\text{A}\text{T}\text{E}\text{X}$ distributor has prepared for you. Most of the major distributions (like e.g. Tex Live or MikTeX) do so.

The fallback option is to grab the `spelatex.sty` file from CTAN and put it in our TEX search path.

- ▷ The $\text{S}_p\text{eL}\text{A}\text{T}\text{E}\text{X}$ package uses a number of auxiliary packages, fetch them from CTAN [12] if your TEX distributor does not provide them. The ones used are: `expl3`, `hyperref`, `xcolor`, `ifthen`, `verbatim`, `fancyvrb`, `newfile`, `rotating`, `babel`, `kvoptions` and `xkeyval`. The $\text{S}_p\text{eL}\text{A}\text{T}\text{E}\text{X}$ package uses a number of auxiliary packages, fetch them from CTAN [12] if your TEX distributor does not provide them. The ones used are: `expl3`, `hyperref`, `xcolor`, `ifthen`, `verbatim`, `fancyvrb`, `newfile`, `rotating`, `babel`, `kvoptions` and `xkeyval`.

3.2 The `spel-wizard.pl` speech generator ▷

3.2.1 The script ▷

- ▷ You can install the wizard assuming you have a working Perl interpreter installed. Assuming you're on GNU/Linux or MAC, you should be able to find an installation package using the package manager for your distribution. If you are on MS-Windows, look for Strawberry perl or ActiveState perl. You can install the wizard assuming you have a working Perl interpreter installed. Assuming you're on GNU/Linux or MAC, you should be able to find an installation package using the package manager for your distribution. If you are on MS-Windows, look for Strawberry perl or ActiveState perl.
- ▷ The only thing to do is to install the `SpeL::Wizard` module. You can do this with the perl package manager for your interpreter. The only thing to do is to install the `SpeL::Wizard` module. You can do this with the perl package manager for your interpreter.
- ▷ Open a terminal or command window, and then enter on the command line (the dollar represents your prompt): Open a terminal or command window, and then enter on the command line (the dollar represents your prompt):
- ▷ On GNU/Linux and MAC: `$ cpanm SpeL::Wizard`
For Strawberry perl: `$ cpan SpeL::Wizard`
For ActiveState perl: `$ ppm install SpeL-Wizard`
On GNU/Linux and MAC:
`$ cpanm SpeL::Wizard`
For Strawberry perl: `$ cpan SpeL::Wizard`
For ActiveState perl: `$ ppm install SpeL-Wizard`
- ▷ The script `spel-wizard.pl` will be installed on your system. Make sure it is on your search path. The script `spel-wizard.pl` will be installed on your system. Make sure it is on your search path.

3.2.2 The configuration file ▷

- ▷ Finally, you need to provide `spel-wizard.pl` with an appropriate config-file, named `tts.conf` that sets up the text-to-speech conversion. Below you can find a setup for Festival [8]:

```
[engine]
tts=festival

[language-tags]
dutch=nl
english=en-gb

[voices]
dutch=nl1_mbrola
english=en1_mbrola
```

- ▷ And additionally, for the Microsoft users a setup for Balabolka [9]:

```
[engine]
tts=balabolka
```

```
[language-tags]
english=en-us
```

```
[voices]
english=Zira
```

- ▷ The `tts` configuration parameter defines the speech engine to use. The `language-tags` section defines how the babel languages are mapped to internationalization codes (also known as locales). The `voices` section specifies what voice to use for a specific language. The `tts` configuration parameter defines the speech engine to use. The `language-tags` section defines how the babel languages are mapped to internationalization codes (also known as locales). The `voices` section specifies what voice to use for a specific language.
- ▷ An environment variable can specify where your config file is located, e.g., on GNU/Linux:

```
$ export SPELWIZARD_CONFIG=/home/wdaems/.config/tts.conf
```

- ▷ If that variable is not set, the script will look in a subdirectory `.spel_wizard` of your home-folder (or `%userprofile%` on MS-Windows), or it will take the default that came with the `SpEL::Wizard` module.
- ▷ Be aware that you need to install your text-to-speech tool yourself according to the documentation provided by the tool provider. In addition, make sure it the executable is in your search path. In case you are using an online text-to-speech service provider you will need to get an account on their cloud platform and setup credentials and whatever is needed to get going. Providing assistance for this is beyond the aim of this manual. Be aware that you need to install your text-to-speech tool yourself according to the documentation provided by the tool provider. In addition, make sure it the executable is in your search path. In case you are using an online text-to-speech service provider you will need to get an account on their cloud platform and setup credentials and whatever is needed to get going. Providing assistance for this is beyond the aim of this manual.

3.3 The PDF viewer ▷

- ▷ You need to make sure you have a PDF-viewer that supports file links E.g., `xpdf` [14] does not, but `evince` [15], `okular` [16] and `Adobe Reader` [3] do. You need to make sure you have a PDF-viewer that supports file links E.g., `xpdf` [14] does not, but `evince` [15], `okular` [16] and `Adobe Reader` [3] do.

3.4 The media player ▷

- ▷ When clicking a `SpEL`-enabled item in your PDF-file, your media player is started to play the `.ogg` or `.m3u`-file. On GNU/Linux most media players work

fine (SoX, totem, vlc, ...). When clicking a $\text{Sp}\epsilon\text{L}\text{A}\text{T}\text{E}\text{X}$ -enabled item in your PDF-file, your media player is started to play the `.ogg` or `.m3u`-file. On GNU/Linux most media players work fine (SoX, totem, vlc, ...).

- ▷ On windows, we recommend using vlc. It works out of the box. When using the stock Windows Media Player, you will need to add every folder that contains a PDF you'd like to have read, to your Media Player library. Search the internet to find instructions on that and be prepared: in line with Microsoft's standard practice it is well hidden in the interface. On windows, we recommend using vlc. It works out of the box. When using the stock Windows Media Player, you will need to add every folder that contains a PDF you'd like to have read, to your Media Player library. Search the internet to find instructions on that and be prepared: in line with Microsoft's standard practice it is well hidden in the interface.
- ▷ If you gave the `server` option to the $\text{Sp}\epsilon\text{L}\text{A}\text{T}\text{E}\text{X}$ package, then your favorite web-browser will be started to download and play the file. If you move it out of your way, you can avoid that it jumps in front of your text every time again. If you gave the `server` option to the $\text{Sp}\epsilon\text{L}\text{A}\text{T}\text{E}\text{X}$ package, then your favorite webbrowser will be started to download and play the file. If you move it out of your way, you can avoid that it jumps in front of your text every time again.

4 Usage ▷

4.1 Preparing your document source ▷

- ▷ Using the $\text{Sp}\epsilon\text{L}\text{A}\text{T}\text{E}\text{X}$ package is very simple. Just load the package's style file using an appropriate `\usepackage{spelatex}`.
- ▷ There are 5 things to do: There are 5 things to do:
 - 1.▷ Treat the defunct implicit spelchunks.
 - 2.▷ Treat the explicit spelchunks.
 - 3.▷ Manually provide text to read when needed.
 - 4.▷ Provide audiodescriptions or preprocessing instructions for your typesetting macros.
 - 5.▷ Provide audiodescriptions or preprocessing instructions for your typesetting environments.

We will now explain all required macros.

4.1.1 Treat the implicit spelchunks ▷

- ▷ The texts of chapter, (sub)section titles, a.s.o. will be formatted automatically such that they are hyperlinked to the appropriate audio file. Therefore, this step was not mentioned above. It is done automatically for you by using the $\text{Sp}\epsilon\text{L}\text{A}\text{T}\text{E}\text{X}$ package. The texts of chapter, (sub)section titles, a.s.o. will be formatted automatically such that they are hyperlinked to the appropriate audio

file. Therefore, this step was not mentioned above. It is done automatically for you by using the $\text{S}_{\text{p}}\text{eL}\text{A}\text{T}\text{E}\text{X}$ package.

▷ You only need to cover your *defunct implicit spelchunks*:

`\spelitem` Use this macro instead of the `\item` macro to make sure your list environments are converted to speech chunks appropriately. You only need to cover your *defunct implicit spelchunks*:

`\spelitem` Use this macro instead of the `\item` macro to make sure your list environments are converted to speech chunks appropriately.

▷ Example:

```
We like
\begin{itemize}
  \spelitem{apples,}
  \spelitem{pears, and}
  \spelitem{oranges.}
\end{itemize}
```

▷ Another example:

```
If you don't know these fruits:
\begin{description}
  \spelitem[apple]{a green round fruit}
  \spelitem[pears]{a green pointy-shaped fruit}
  \spelitem[orange]{an orange round fruit}
\end{description}
```

4.1.2 Treat the explicit spelchunks ▷

`spelchunk (env.)` ▷ Use this environment to embed the chunks of text in that you want to generate audio for. In case the content is an equation, a figure or a table, we recommend specifying `arealink` as the optional argument to the `spelchunk` environment. It makes the entire equation an active hyperlink. Note that you cannot specify an `arealink` when the area to be covered is vertical-mode object. In common language: put your `arealink spelchunk` environments inside a `center` environment and not the other way around.

`spelchunk (env.)` Use this environment to embed the chunks of text in that you want to generate audio for. In case the content is an equation, a figure or a table, we recommend specifying `arealink` as the optional argument to the `spelchunk` environment. It makes the entire equation an active hyperlink. Note that you cannot specify an `arealink` when the area to be covered is vertical-mode object. In common language: put your `arealink spelchunk` environments inside a `center` environment and not the other way around.

▷ Example:

(note: the example below is not $\text{S}_{\text{p}}\text{eL}\text{A}\text{T}\text{E}\text{X}$ -enabled in this manual because it generates internal package problems) Example:

(note: the example below is not $\text{S}_{\text{p}}\text{eL}\text{A}\text{T}\text{E}\text{X}$ -enabled in this manual because it generates internal package problems)

```
\begin{spelchunk}
  An ordinary paragraph must be embedded in this environment.
```

The same holds for equations! However, then we recommend using the `|arealink|` option, as that makes the full area of the equation clickable and avoids an empty white line before the equation.

```
\end{spelchunk}
\begin{spelchunk[arealink]
  \begin{align}
    E &= m c^2 \\
    e^{j\pi} &= -1
  \end{align}
\end{spelchunk}
```

4.1.3 Manually provide text to read when needed ▷

`spelchunkad` (*env.*) ▷ If you want a different text to be used for the previous `spelchunk` environment, this environment allows you to specify it. For plain text or math environments, this is also your generic escape route in case the `spel-wizard.pl` parser does not work as you'd like it to.

▷ Just have your `spelchunk` environment followed by a `spelchunkad` environment that specifies the correct text to read out loud. However, please, file a bug report, such that we can improve the tool.

▷ Example:

(note: the example below is again not $S_{p}eL^A T_{E}X$ -enabled because it generates internal package problems)

```
\begin{spelchunk}
  An ordinary paragraph must be embedded in this environment.
\end{spelchunk}
\begin{spelchunkad}
  Do not forget to embed ordinary paragraphs in this environment.
\end{spelchunkad}
```

▷ For non-textual material such as figures or tables, this allows you to specify a sensible text that acts as an audio description for that material.

Just have your `spelchunk` environment that surrounds your figure or table, followed by a `spelchunkad` environment that provides the audio description for the non-textual material.

▷ Example:

(note: the example below is for a third time not $S_{p}eL^A T_{E}X$ -enabled because it generates internal package problems)

```
\begin{spelchunk}
  \includegraphics{engine.jpg}
\end{spelchunk}
\begin{spelchunkad}
  The image shows a turbo-fan engine of an aircraft. One can
  clearly see the silver blades of the fan, and the housing. Note
  how little spacing there is between the blades and the housing.
\end{spelchunkad}
```


4.1.4 Use the shorthand `\<<<-macro` ▷

`\<<<` ▷ This macro takes the text to be read-out loud as an argument. It is a shorthand for the `spelchunk` environment. Options you would have given to the `spelchunk` environment can be given as an optional argument to this macro. This macro takes the text to be read-out loud as an argument. It is a shorthand for the `spelchunk` environment. Options you would have given to the `spelchunk` environment can be given as an optional argument to this macro.

▷ Retaking the example of section 4.1.2, using the shorthand, we obtain:

(note: the example below is once again not $\text{Sp}\epsilon\text{L}\text{A}\text{T}\text{E}\text{X}$ -enabled in this manual because it generates internal package problems) Retaking the example of section 4.1.2, using the shorthand, we obtain:

(note: the example below is once again not $\text{Sp}\epsilon\text{L}\text{A}\text{T}\text{E}\text{X}$ -enabled in this manual because it generates internal package problems)

```
\<<<{
  An ordinary paragraph must be embedded in this macro.
  The same holds for equations! However, then we recommend using
  the |arealink| option, as that makes the full area of the
  equation clickable and avoids an empty white line before the
  equation.
}
\<<<[arealink]{
  \begin{align}
    E &= m c^2 \\
    e^{j\pi} &= -1
  \end{align}
}
```

4.1.5 Provide descriptions for typesetting macros ▷

`\spelmacad` ▷ Often, recurring constructs are being typeset using a dedicated macro, defined by the user. For example, to consistently typeset input voltages for arbitrary pins, one might have defined the macro:

```
\newcommand\vin[2][IN]{\ensuremath{v_{\mathit{\#1},\#2}}}
```

▷ This allows easy specification of

```
\vin{1} = \sin 20 t
```

resulting in $v_{IN,1} = \sin 20t$.

▷ However one might want this line to be read as 'the input voltage at pin 1 equals sine 20 t'.

To this end, one can provide an description for this macro using the `spelmacad` macro.

▷ Example:

```
\spelmacad\vin}[1][IN]{the #1put voltage at pin #2}
```

Note that the audio description in this case will only be acceptable, for arguments IN and OUT. One clearly has to take the audio description into account when defining \LaTeX -macros.

4.1.6 Descriptions for typesetting environments ▷

`\spelenvad` ▷ Often, recurring constructs are being typeset using a dedicated environment, defined by the user. For example, to consistently typeset a proof or illustration one might have defined the environment:

```
\newenvironment{proof}[2] [Proof]{
  \textbf{#1: #2}\
}
{
  \hfill$\blacksquare$\
}
```

▷ This allows easy specification of an illustration as:

```
\begin{proof}[Illustration]{solving a quadratic equation}
  blabla
\end{proof}
```

▷ However one might want this environment to be read as 'Illustration of solving a quadratic equation: blabla. This concludes this illustration.'

To this end, one can provide an description for this macro using the `spelenvad` macro.

▷ Example:

```
\spelenvad{proof}[1] [Illustration]
{#1 of #2:}
{This concludes this #1.}
```

4.1.7 Inline descriptions ▷

`\spelinelad` ▷ Sometimes a spel chunk contains a subblock that cannot be treated by the wizard. E.g., een tikzpicture that is included in an align environment. Nesting spelchunks is unfortunately not possible. In that case, one can use the `\spelinelad` macro. This takes two arguments, the first being the part that needs to end up in your written manuscript, the second argument is the audio description. Sometimes a spel chunk contains a subblock that cannot be treated by the wizard. E.g., een tikzpicture that is included in an align environment. Nesting spelchunks is unfortunately not possible. In that case, one can use the `\spelinelad` macro. This takes two arguments, the first being the part that needs to end up in your written manuscript, the second argument is the audio description.

▷ The following equation illustrates its use: The following equation illustrates its use:


```

\begin{spelchunk}[arealink]
\begin{align}
\phi &= \arctan \frac{\sqrt{1-\zeta^2}}{\zeta} \\
&\sim\sim\text{\spelinlad{
\begin{tikzpicture}
\draw[->] (-0.5,1) -- (-0.5,-0.5);
\draw(0,0) -- node[below] {\zeta} (2,0)
-- node[right] {\sqrt{1-\zeta^2}} (2,1)
-- node[above left] {\phi} cycle;
\draw (0:0.5) arc (0:28:0.5);
\end{tikzpicture}
}\text{Given the trigonometric relations in the triangle,
we can deduce}}
&= \arccos \zeta
\end{align}
\end{spelchunk}

```

- ▷ When you run this code through \LaTeX you obtain: When you run this code through \LaTeX you obtain:

$$\phi = \arctan \frac{\sqrt{1-\zeta^2}}{\zeta} \tag{1}$$



$$= \arccos \zeta \tag{2}$$

$$= \arccos \zeta \tag{3}$$

4.1.8 Using the `i18n` features of `spel-wizard.pl` when describing your macros and environments ▷

- ▷ Sooner rather than later you will feel the need to provide reading alternatives for your constructs that are language dependent. In that case you can call the `i18n` features that are built into `spel-wizard.pl`. We illustrate this with an example.
- ▷ Assume you've made your own command to raise numbers to a power, and you provide and description for your macro.

```

\newcommand\numtopower[2]{#1^{#2}}
\spelmacad{numtopower}[2]{#1 to the power of #2}

```

- ▷ The problem with this solution is, that it only works for one language. The solution is to use an `i18n` expression in your description:

```

\spelmacad{numtopower}[2]{#1 @{\i18n(Power,#2)}}

```

- ▷ This will call the `maketext` function (See `Locale::Maketext`) on the Lexicon provided in `SpeL::Wizard::I18n`, as:

```
$SpEL::Wizzard::I18n::lh->maketext( 'Power', "#2")
```

▷ to read your macro.

4.1.9 The extra math commands ▷

Note that these commands are only available if you provide the package option `extramath`.

`\setenum` ▷ This macro typesets an enumeration set and makes sure `spel-wizard.pl` can read it properly. ▷

```
\begin{equation}
P = \setenum{ 2, 3, 5, 7, 11, 13, \ldots }
\end{equation}
```

`\setdesc` ▷ This macro typesets a definition set and makes sure `spel-wizard.pl` can read it properly. ▷

```
\begin{equation}
P = \setdesc{ n \in \mathbb{N} \mid n \text{-is prime} }
\end{equation}
```

4.2 Going through the flow ▷

▷ Once your document source has been prepared, you are ready for the regular `SpELpTeX-flow`. It consists of 3 steps.

1. ▷ Create a `jobname-spel` subdirectory in the working directory your `LATEX` source document is in (replace `jobname` with the basename of your latex file, the final `-spel` is a literal).
2. ▷ Run your document 3-times through your `{pdf,Xe,Lua}LATEX`-compiler to get all the references right.
3. ▷ Run the `spel-wizard.pl` speech generator (see `scripts` directory or the wrapper provided by the package manager), by launching it with the base name of your document as command-line argument.
E.g.: `spel-wizard.pl -v example`
The `-v` argument causes the script to be somewhat more verbose.

▷ The result of this will be a PDF file equipped with links to audio files in the 'speech' subdirectory. Alas your PDF file has been become a little less portable, as it now requires the 'speech' subdirectory to be complete. You might want to package the ensemble into a tar-file or zip-archive.

5 Example



- ▷ Below, you can find a simple example to give you a head-start. In order not to spoil the fun for you, the embedded version here is not speech-enabled.

```
1 \documentclass{report}
2
3 \usepackage[dutch,english]{babel} % load babel before spelatex to avoid
4                                     % option clash!
5 \selectlanguage{english}
6 \usepackage[format=ogg,
7     server=https://ctan.org/tex-archive/macros/latex/contrib/spelatex/Example
8     ]
9     {spelatex}
10
11 \newrobustcmd\CTAN{CTAN}
12 \spelmacad{CTAN}{see-tan}
13 \newrobustcmd\CPAN{CPAN}
14 \spelmacad{CPAN}{see-pan}
15
16 \title{\spelatex{} Example}
17 \author{Walter Daems and Paul Levrie}
18 \date{2024/09/09}
19 \setlength\parindent{0em}
20 \setlength\parskip{1ex}
21
22 \begin{document}
23
24 \maketitle
25
26 \chapter{Introduction}
27
28 \<<<{
29     This file is just a simple showcase of the features of \spelatex{}.
30     Below, you'll find examples of:
31 }
32
33 \begin{itemize}
34     \spelitem{a simple equation}
35     \spelitem{a more complex equation}
36 \end{itemize}
37
38 \chapter{Examples}
39 \section{A simple equation}
40 \label{eqn:simple}
41 \<<<{
42     Consider the following simple definition of a polynomial function and
43     check its spoken version by clicking on it.
44 }
45 \<<<[arealink]{
46     \begin{equation}
47         f(x) = x^5 - x^4 + 7 x^3 + 3 x^2 - 8 x + 25
48     \end{equation}
49 }
50 \<<<{
51     This seems a simple equation, however, it is not so straightforward
52     for an automated reader, to read it correctly.
53 }
54
55 \section{A more complex equation}
56 \newcommand\xx[2]{\ensuremath{\#1_{\#2}}}
```

```

57 \spelmacad{xx}[2]{#1 #2}
58
59 \label{eqn:complex}
60 \begin{spelchunk}
61   For a lightray that hits the parabola at the point
62    $P(t, 9 - \frac{t^2}{4})$ , the reflected ray has slope  $\tan 2\alpha$ .
63   Since the slope of the tangent to the parabola at  $P$  is
64   equal to  $\tan\alpha = -\frac{t}{2}$ , the equation of the
65   reflected ray is given by
66 \end{spelchunk}
67 \begin{spelchunk}[arealink]
68   \[
69   y - 9 + \frac{t^2}{4} = -\frac{4t}{4 - t^2} \cdot (x - t)
70   \]
71 \end{spelchunk}
72
73 \section{Remark}
74 \<<<{
75   Instead of the \texttt{\textbackslash}<<< macro, one can also use the
76   spelchunk environment. We did this in the next sections.
77 }
78
79 \chapter{More advanced topics}
80
81 \selectlanguage{dutch}
82 \section{Een andere taal}
83 \begin{spelchunk}
84 \spelatex{} is ook volledig babel-actief, wat wil zeggen dat de
85 voorleesstem de geselecteerde taal zal volgen.
86 \end{spelchunk}
87
88 \begin{spelchunk}[arealink]
89   \[
90   y - 9 + \frac{t^2}{4} = -\frac{4t}{4 - t^2} \cdot (x - t)
91   \]
92 \end{spelchunk}
93
94 \selectlanguage{english}
95
96 \section{And some extras}
97 \subsection{Citations}
98 \begin{spelchunk}
99   Two excellent repositories are \CPAN{} \cite{CPAN} and \CTAN{} \cite{CTAN}.
100 \end{spelchunk}
101
102 \subsection{References to labels}
103 \begin{spelchunk}
104   Section~\ref{eqn:simple} contains an illustration of a simple
105   equation. For a more complex equation, we refer the user to
106   section~\ref{eqn:complex}.
107 \end{spelchunk}
108
109 \selectlanguage{dutch}
110
111 \bibliographystyle{alpha}
112
113 \begin{thebibliography}{99}
114
115 \bibitem{CTAN}
116   The Comprehensive \TeX{} Archive Network.
117   \newblock \url{http://www.ctan.org}.
118   \newblock online, accessed in August 2021.
119

```

```

120 \bibitem{CPAN}
121 The Comprehensive Perl Archive Network.
122 \newblock \url{http://www.cpan.org}.
123 \newblock online, accessed in August 2021.
124
125 \end{thebibliography}
126
127 \end{document}

```

6 Demo ▷

- ▷ The examples below have been composed and used to test the math reading capabilities of `SppeLATEX` and `spel-wizard.pl`. The source code has not been made visible in this document. If you'd like to see the source code, check the original `.dtx`-file that was used to generate this PDF-file.

6.1 Numbers ▷

$$\pi \tag{4}$$

$$-31415 \tag{5}$$

$$1.25 \tag{6}$$

$$-0.34 \times 10^4 \tag{7}$$

$$12 - j3 \tag{8}$$

$$-31415.23 + .45i \tag{9}$$

6.2 Fractions ▷

6.2.1 A fraction only containing numbers ▷

- ▷ You will probably have seen more complex numbers in your life. You will probably have seen more complex numbers in your life.

$$x = -\frac{1}{2} \tag{10}$$

$$y = -\sqrt{\frac{\pi}{2}} \tag{11}$$

$$x = -\frac{1}{2} \tag{12}$$

$$y = -\sqrt{\frac{\pi}{2}} \tag{13}$$

- ▷ Or should I say real numbers? Or should I say real numbers?

6.2.2 A fraction with a little more under the hood

▷

$$u = -\frac{x^2 + 35}{\sqrt{12}} \quad (14)$$

$$v = -\frac{\sqrt{\frac{\pi}{2}}}{-3x^2 + 3} \quad (15)$$

6.3 Simple expressions

▷

6.3.1 A polynomial function

▷

$$f(x) = x^5 - x^4 + 7x^3 + 3x^2 - 8x + 23 \quad (16)$$

6.3.2 Some more complex equations

▷

▷ Here's de Moivre's formula:

$$(\cos x + j \sin x)^n = \cos(nx) + j \sin(nx) \quad (17)$$

▷ Euler's relationship:

$$e^{j\phi} = \cos \phi + j \sin \phi \quad (18)$$

▷ Euler's identity:

$$e^{j\pi} + 1 = 0 \quad (19)$$

6.3.3 A rather well-known definite integral

▷

$$\int_{-\infty}^{\infty} e^{-x^2} dx = \sqrt{\pi} \quad (20)$$

6.4 Sets

▷

▷ Let's check the two set commands this package provides: `\setenum` and `\setdesc`:

$$P = \{2, 3, 5, 7, 11, 13, \dots\} \quad (21)$$

$$P = \{n \in \mathbb{N} \mid n \text{ is prime}\} \quad (22)$$

6.5 Matrices

▷

▷ How about some linear algebra?

$$\begin{bmatrix} 3 & 4 \\ 7 & 2 \end{bmatrix} \cdot \begin{bmatrix} x \\ y \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \end{bmatrix} \quad (23)$$

$$\begin{vmatrix} 3 & 4 \\ 7 & 2 \end{vmatrix} = -22 \quad (24)$$

6.6 Figures and Tables

▷

6.6.1 Figures

▷

▷ The example Fig. 2 illustrates the voice-aid that can be added to figures.




Figure 2: A block diagram of the filter system

6.6.2 Tables

▷

▷ Tables can also be equipped with a sensible description: Tables can also be equipped with a sensible description:

Food	Sweet	Bitter
apples	•	
unsweetened coffee		•
cake	•	
chocolate	•	•

6.7 A parabola tale

▷

▷ For a lightray that hits the parabola at the point $P(t, 9 - \frac{t^2}{4})$, the reflected ray has slope $\tan 2\alpha$. Since the slope of the tangent to the parabola at P is equal to $\tan \alpha = -\frac{t}{2}$, the equation of the reflected ray is given by

$$y - 9 + \frac{t^2}{4} = -\frac{4t}{4 - t^2} \cdot (x - t) \quad (25)$$

▷ The x -coordinate of the point of intersection of the reflected ray with a fixed line $y = u$ satisfies:

$$u - 9 + \frac{t^2}{4} = -\frac{4t}{4 - t^2} \cdot (x - t) \quad (26)$$

▷ We calculate the minimal value of this x for varying t , by differentiating (26) with respect to t and assuming that $\frac{dx}{dt} = 0$:

$$\frac{t}{2} = -\frac{4(4 + t^2)}{(4 - t^2)^2}(x - t) - \frac{4t}{4 - t^2} \cdot (-1) \Leftrightarrow x = 3\frac{t}{2} - \frac{t^3}{8}$$

▷ Inserting in the equation containing u gives us the relation between t and u :

$$u = 9 - 3\frac{t^2}{4}$$

▷ This leads to a system of parametric equations for the caustic:

$$\begin{cases} x = 3\frac{t}{2} - \frac{t^3}{8} \\ y = 9 - 3\frac{t^2}{4} \end{cases} \Leftrightarrow \begin{cases} x = \frac{t}{2} \cdot (3 - \frac{t^2}{4}) \\ y = 3(3 - \frac{t^2}{4}) \end{cases}$$

▷ It is now easy to eliminate the parameter t . As you can see, $t = \frac{6x}{y}$. Inserting into the equation for y gives us the equation of Tschirnhausen's cubic.

7 Implementation ▷

▷ To ease the implementation work and because raw \LaTeX code is difficult to read on itself, We took the liberty of not providing this section with speech chunks (except for this introduction text).

7.1 Design principles ▷

$\text{Spe}\text{\LaTeX}$ has been developed using the following main targets in mind. Some of them are common sense design principles, some of them are specific for this application.

- minimal effort in preparing a \LaTeX manuscript for use with $\text{Spe}\text{\LaTeX}$
- maximal compatibility with existing \LaTeX packages
- no (or minimal) compromise mathematical reading capabilities for mathematical constructs
- user extensible audio preprocessor
- minimal use of processing power for text to speech conversion

7.2 Auxiliary Packages ▷

The $\text{Spe}\text{\LaTeX}$ package uses some basic auxiliary packages to make life easy.

```
1 \RequirePackage{expl3}
2 \RequirePackage{hyperref}
3 \AtBeginDocument{
4   \hypersetup{colorlinks=false, hidelinks=true}
5 }
6 \RequirePackage{xcolor}
7 \RequirePackage{ifthen}
8 \RequirePackage{verbatim}
9 \RequirePackage{fancyvrb}
10 \RequirePackage{newfile}
11 \RequirePackage{rotating}
12 \RequirePackage{babel}
13 \RequirePackage{kvoptions}
14 \RequirePackage{xkeyval}
```

7.3 Options ▷

```
15 \SetupKeyvalOptions{
16   family=spel,
17   prefix=spel@
18 }
19 \DeclareStringOption[ogg]{format}
20 \DeclareStringOption[local]{server}
21 \DeclareStringOption[full]{markervisibility}
22 \DeclareBoolOption[false]{disabled}
23 \DeclareBoolOption[false]{extramath}
24 \ProcessKeyvalOptions*
```

7.4 Logos ▷

Vanity is everything, so let's make some logoware.

`\spelatex` This is the official $\text{S}_p\text{eL}\text{A}\text{T}\text{E}\text{X}$ logo.

```
25 \DeclareRobustCommand{\spelatex}{S\kern-0.3ex\raisebox{-0.1ex}{\rotatebox{-15}{p}}\kern-
0.25ex\raisebox{0.1ex}{\rotatebox{10}{e}}\kern-0.1ex\-\LaTeX}
```

`\spelpl` This is the official `spel-wizard.pl` logo.

```
26 \DeclareRobustCommand{\spelpl}{\texttt{spel-wizard.pl}}
```

7.5 The speech stream ▷

The basic structural elements of a document (title, chapters, sections, ...) are written to the speech index stream. This is a textfile that has the same base name as your $\text{L}\text{A}\text{T}\text{E}\text{X}$ job and has extension `.spelidx`.

It is the index to the chunks of text that are written to the speech directory.

The `.spelidx` file requires postprocessing by the `spel-wizard.pl` script in order to obtain the required audio files.

The speech stream needs to be open before the preamble's title, author and date.

```
27 \newoutputstream{chunk}
28 \newoutputstream{spelidx}
29 \openoutputfile{\jobname.spelidx}{spelidx}
```

The stream needs to be closed upon termination of the document.

```
30 \AtEndDocument{
31   \closeoutputstream{spelidx}%
32 }
```

To begin with, we write the standard locations for audio and chunk data to the `.spelidx` file.

```
33 \newcommand\audiodir{\jobname-spel}
34 \newcommand\chunkdir{\jobname-spel}
35 \addtostream{spelidx}{format|\spel@format}
36 \addtostream{spelidx}{audiodir|\audiodir}
37 \addtostream{spelidx}{chunkdir|\chunkdir}
38 \addtostream{spelidx}{server|\spel@server}
39 \ExplSyntaxOn
```

```

40 \newcommand\linksdir{
41   \str_if_eq:VnTF{\spel@server}{local}{./\audiodir}{\spel@server/\audiodir}
42 }
43 \ExplSyntaxOff

```

To ease writing to the speech index stream, we define a `\spelidxwrite` function to take care of appropriate formatting.

`\spelidxwrite` This is an internal macro, used to write information to the `.spelidx` file and to a corresponding chunk file.

```

44 \ifspel@disabled\newcommand{\spelidxwrite}[2]{}\else
45 \newcommand{\spelidxwrite}[2]{%
46   \typeout{SpeLaTeX: Generating #1 - #2}%
47   \addtostream{spelidx}{#1|#2}%
48 }
49 \fi

```

To ease writing speech chunk, we define a `\spel@chunkwrite` function.

`\spel@chunkwrite` This is an internal macro, used to write information to the speech chunk files.

```

50 \ifspel@disabled\newcommand{\spel@chunkwrite}[2]{}\else
51 \newcommand{\spel@chunkwrite}[2]{%
52   \openoutputfile{\audiodir/#1.tex}{chunk}%
53   \addtostream{chunk}{#2}%
54   \closeoutputstream{chunk}%
55 }
56 \fi

```

7.6 Create missing counters ▷

As we need to be able to fully identify every speech chunk, we need to provide some missing counters for the starred versions of the sectioning commands.

`spel@spart` counter

```

57 \newcounter{spel@spart}
58 \renewcommand\thespel@spart{\@arabic\c@spel@spart}
59 \setcounter{spel@spart}{0}

```

`spel@schapter` counter

```

60 \ifx\c@chapter\undefined
61 \else
62 \ifx\c@part\undefined
63 \newcounter{spel@schapter}
64 \else
65 \newcounter{spel@schapter}[part]
66 \fi
67 \renewcommand\thespel@schapter{\@arabic\c@spel@schapter}
68 \setcounter{spel@schapter}{0}
69 \fi

```

`spel@ssect` counter

```

70 \ifx\c@chapter\undefined
71 \newcounter{spel@ssect}

```

```

72 \else
73 \newcounter{spel@ssect}[chapter]
74 \fi
75 \renewcommand\thespel@ssect{\@arabic\c@spel@ssect}
76 \setcounter{spel@ssect}{0}

```

In addition, some elements that are not canonically numbered require a unique and monotonous numbering.

`spel@footnote` counter

```

77 \newcounter{spel@footnote}
78 \renewcommand\thespel@footnote{\@arabic\c@spel@footnote}
79 \setcounter{spel@footnote}{0}

```

`spel@chunk` counter

```

80 \newcounter{spel@chunk}[subparagraph]
81 \renewcommand\thespel@chunk{\@arabic\c@spel@chunk}
82 \setcounter{spel@chunk}{0}

```

7.7 Setting up the language ▷

We want to make sure that babel communicates the switching of languages to spel, such that it can take note of it. This allows the spel engine to select an appropriate language-capable voice when generating the spoken text.

```

83 \AddBabelHook{informspel}{write}{\spel@idxwrite{language}{\language}}
84 \EnableBabelHook{informspel}

```

7.8 Setting up the visibility ▷

```

85 \ExplSyntaxOn
86 \definecolor{faintgray}{rgb}{0.9,0.9,0.9}
87 \str_if_eq:VnTF{\spel@markervisibility}{none}{
88   \colorlet{spel@color@right}{white}
89   \colorlet{spel@color@left}{white}
90 }{}
91 \str_if_eq:VnTF{\spel@markervisibility}{onlygroups}{
92   \colorlet{spel@color@right}{black!25}
93   \colorlet{spel@color@left}{white}
94 }{}
95 \str_if_eq:VnTF{\spel@markervisibility}{full}{
96   \colorlet{spel@color@right}{black!25}
97   \colorlet{spel@color@left}{black!25}
98 }{}
99 \ExplSyntaxOff

```

7.9 Generating speech chunks — implicitly ▷

7.9.1 Auxiliary macros ▷

We define a macro to generate wrappers for single-line text elements. The `\spel@registerelement` macro does the job. The user can even use the macro for his own custom single-line text elements (e.g., for a subtitle, a version string).

`\spel@registerelement` generic macro to register single-line text elements

```
100 \ifspel@disabled\newcommand{\spel@registerelement}[1]{\else
101 \newcommand{\spel@registerelement}[1]{%
102   \expandafter\let\csname spel@#1\expandafter\endcsname\csname #1\endcsname
103   \expandafter\gdef\csname #1\endcsname##1{%
104     \spel@chunkwrite{#1}{##1}
105     \csname spel@#1\endcsname{\href{\linksdir/#1.\spel@format}{##1}}
106     \spel@idxwrite{#1}{#1}
107   }
108 }
109 \fi
```

7.9.2 Title elements ▷

By redefining the title elements, `\title`, `\author` and `\date` we avoid having to chunk them.

Using this macro, we can easily take care of all title-like elements, using:

```
110 \spel@idxwrite{language}{\languagename}
111 \spel@registerelement{title}
112 \spel@registerelement{date}
113 \spel@registerelement{author}
```

We registered the initial language in advance, to make sure the wizard knows what language to use for these elements.

7.9.3 Table of contents ▷

```
114 \ifspel@disabled\else
115 \let\spel@addcontentsline\addcontentsline
116 \renewcommand\addcontentsline[3]{%
117   \let\spel@href\href%
118   \renewcommand\href[2]{#2}%
119   \spel@addcontentsline{#1}{#2}{#3}%
120   \let\href\spel@href%
121 }
122 \providecommand{\tableofcontents}{}
123 \renewcommand\tableofcontents{%
124   \if@twocolumn
125     \@restonecoltrue\onecolumn
126   \else
127     \@restonecolfalse
128   \fi
129   \@ifclassloaded{article}{\section*{\contentsname}}{\chapter*{\contentsname}}
130   \@mkboth{%
131     \MakeUppercase\contentsname}{\MakeUppercase\contentsname}%
132   \@starttoc{toc}%
133   \if@restonecol\twocolumn\fi
134 }
135 \fi
```

7.9.4 Sectioning commands ▷

`\@part` This is a simple wrapper around the regular `\@part` macro.

```
136 \ifspel@disabled\else
137 \let\spel@part\@part
```

```

138 \def\@part[#1]#2{%
139   \setcounter{spel@chunk}{0}% need this because counter resetting fails
140   \spel@@part[#1]{\href{\linksdire/\spel@@optpart.\spel@format}{#2}}%
141   \spel@idxwrite{part \thepart}{\spel@@optpart}%
142   \spel@chunkwrite{\spel@@optpart}{#2}%
143 }
144 \fi

```

`\@spart` This is a simple wrapper around the regular `\@spart` macro.

```

145 \ifspel@disabled\else
146 \let\spel@@spart\@spart
147 \def\@spart#1{%
148   \stepcounter{spel@spart}%
149   \setcounter{spel@chunk}{0}% need this because counter resetting fails
150   \spel@@spart{%
151     \href{\linksdire/\spel@@optpart star-\thespel@spart.\spel@format}{#1}}%
152   \spel@idxwrite{part}{\spel@@optpart star-\thespel@spart}%
153   \spel@chunkwrite{\spel@@optpart star-\thespel@spart}{#1}%
154 }
155 \fi

```

`\@chapter` This is a simple wrapper around the regular `\@chapter` macro. It is defined conditionally on the existence of the `\chapter` macro.

```

156 \newif\ifspel@inschapter
157 \spel@inschapterfalse
158 \ifspel@disabled\else
159 \ifx\thechapter\@undefined\else%
160 \renewcommand\thechapter{%
161 \ifspel@inschapter star-\thespel@schapter\else\@arabic\c@chapter\fi%
162 }
163 \fi
164 \ifx\chapter\@undefined\else
165 \let\spel@@chapter\@chapter
166 \def\@chapter[#1]#2{%
167   \spel@inschapterfalse%
168   \setcounter{spel@chunk}{0}% need this because counter resetting fails
169   \spel@@chapter[#1]{%
170     \href{\linksdire/\spel@@optpart\thechapter.\spel@format}{#2}}%
171   \spel@idxwrite{chapter \thechapter}{\spel@@optpart\thechapter}%
172   \spel@chunkwrite{\spel@@optpart\thechapter}{#2}%
173 }
174 \fi
175 \fi

```

`\@schapter` This is a simple wrapper around the regular `\@schapter` macro. It is defined conditionally on the existence of the `\schapter` macro.

```

176 \ifspel@disabled\else
177 \ifx\chapter\@undefined\else
178 \let\spel@@schapter\@schapter
179 \def\@schapter#1{%
180   \spel@inschaptertrue%
181   \stepcounter{spel@schapter}%
182   \setcounter{spel@chunk}{0}% need this because counter resetting fails
183   \spel@@schapter{%
184     \href{\linksdire/\spel@@optpart star-\thespel@schapter.\spel@format}{#1}}%
185   \spel@idxwrite{chapter}{\spel@@optpart star-\thespel@schapter}%
186   \spel@chunkwrite{\spel@@optpart star-\thespel@schapter}{#1}%
187 }

```

```
188 \fi
189 \fi
```

`\@sect` This is a simple wrapper around the regular `\@sect` macro.

```
190 \ifspel@disabled\else
191 \let\spel@sect\@sect
192 \def\@sect#1#2#3#4#5#6[#7]#8{%
193 % correct default tex behavior
194 \ifnum #2>\c@secnumdepth%
195 \stepcounter{#1}%
196 \fi%
197 \setcounter{spel@chunk}{0}% need this because counter resetting fails
198 \spel@sect{#1}{#2}{#3}{#4}{#5}{#6}[#7]{%
199 \href{\linksdir/\spel@optpart\thesubparagraph.\spel@format}{#8}\hfill%
200 \href{\linksdir/\spel@optpart\thesubparagraph.m3u}
201 {\textcolor{spel@color@right}{$\triangleright$}}}%
202 \def\spel@label{%
203 \ifnum #2>\c@secnumdepth paragraph\else#1 \csname the#1\endcsname\fi}
204 \spel@idxwrite{\spel@label}{\spel@optpart\thesubparagraph}%
205 \spel@chunkwrite{\spel@optpart\thesubparagraph}{#8}%
206 }
207 \fi
```

`\@sect` This is a simple wrapper around the regular `\@ssect` macro.

```
208 \ifspel@disabled\else
209 \let\spel@ssect\@ssect
210 \def\@ssect#1#2#3#4#5{%
211 \stepcounter{spel@ssect}%
212 %\setcounter{spel@chunk}{0}% need this because counter resetting fails
213 \spel@ssect{#1}{#2}{#3}{#4}{%
214 \href{\linksdir/\spel@optpart\thesubparagraph-star-\thespel@ssect.\spel@format}%
215 {#5}}%
216 \spel@idxwrite{section}{\spel@optpart\thesubparagraph-star-\thespel@ssect}%
217 \spel@chunkwrite{\spel@optpart\thesubparagraph-star-\thespel@ssect}{#5}%
218 }
219 \fi
```

7.9.5 Notes ▷

`\@footnotetext` This is a simple wrapper around the regular `\$footnotetext` macro. We use a `spelfootnote` counter to keep track of the individual footnotes.

```
220 \ifspel@disabled\else
221 \let\spel@fntext\@footnotetext
222 \long\def\@footnotetext#1{%
223 \stepcounter{spel@footnote}%
224 \settoheight\spel@mpboxwidth{\usebox\spel@mpbox}%
225 \spel@fntext{%
226 \hspace*{-\spel@mpboxwidth}%
227 \href{\linksdir/footnote-\thespel@footnote.\spel@format}
228 {\usebox\spel@mpbox}#1}%
229 \spel@idxwrite{footnote}{footnote-\thespel@footnote}%
230 \spel@chunkwrite{footnote-\thespel@footnote}{#1}%
231 }
232 \fi
```


7.9.6 Itemizations/Enumerations



`\spelitem` This macro is to be used inside an enumerate, itemize, description environment to automatically cause the generation of a speech chunk.

```
233 \ifspel@disabled\newcommand{\spelitem}{\item}\else
234 \newcommand{\spelitem}{%
235   \@ifnextchar[{\spelitem@opt}{\spelitem@intone}
236 }
237 \fi
```

This macro uses a number of auxiliary macros.

`\spelitem@opt` This is an internal macro intended to deal with the `\item`'s options.

```
238 \def\spelitem@opt[#1]{\spelitem@inttwo{#1}}
```

`\spelitem@opt` This is an internal macro intended to deal with an `\spelitem` without options.

```
239 \def\spelitem@intone#1{%
240   \stepcounter{spel@chunk}%
241   \settowidth\spel@mpptboxwidth{\usebox\spel@mpptbox}%
242   \spel@idxwrite{item}{\spel@@optpart\thesubparagraph-\thespel@chunk}%
243   \spel@chunkwrite{\spel@@optpart\thesubparagraph-\thespel@chunk}{#1}%
244   \item \hspace*{-\spel@mpptboxwidth}%
245   \href{\linksdir/\spel@@optpart\thesubparagraph-\thespel@chunk.\spel@format}
246     {\usebox\spel@mpptbox}#1}
```

`\spelitem@inttwo` This is an internal macro intended to deal with an `\spelitem` with options.

```
247 \def\spelitem@inttwo#1#2{%
248   \stepcounter{spel@chunk}%
249   \settowidth\spel@mpptboxwidth{\usebox\spel@mpptbox}%
250   \spel@idxwrite{item}{\spel@@optpart\thesubparagraph-\thespel@chunk}%
251   \spel@chunkwrite{\spel@@optpart\thesubparagraph-\thespel@chunk}{#1 . #2}%
252   \item[#1] \hspace*{-\spel@mpptboxwidth}%
253   \href{\linksdir/\spel@@optpart\thesubparagraph-\thespel@chunk.\spel@format}
254     {\usebox\spel@mpptbox}#2}
```

`\spelcaption` This is a wrapper for the `\caption` macro, such that it is $\text{S}_{\text{p}}\text{eL}\text{A}\text{T}_{\text{E}}\text{X}$ enabled.

```
255 \ifspel@disabled
256   \newcommand\spelcaption[2] [] {\caption[#1]{#2}}
257 \else
258   \newcommand\spelcaption[2] [] {%
259     \stepcounter{spel@chunk}%
260     \spel@idxwrite{caption}{\spel@@optpart\thesubparagraph-\thespel@chunk}%
261     \spel@chunkwrite{\spel@@optpart\thesubparagraph-\thespel@chunk}{#2}%
262     \caption[#1]{%
263 \protect\href{\linksdir/\spel@@optpart\thesubparagraph-\thespel@chunk.\spel@format}
264       {#2}}
265   }
266 \fi
```

7.9.7 Math environments



`spelwrapenvironment` (*env.*) This are all variants of a wrapper around a math environment such that it is $\text{S}_{\text{p}}\text{eL}\text{A}\text{T}_{\text{E}}\text{X}$ enabled with an arealink.

```

267 \newcommand\spelwrapenvironment@b[1]{
268   \NewDocumentEnvironment{spel#1}{+b}{
269     \<<<[arealink]{%
270       \begin{#1}
271         ##1
272       \end{#1}%
273     }\hspace*{-0.75ex}%
274   }{}%
275 }
276 \newcommand\spelwrapenvironment@ob[1]{
277   \NewDocumentEnvironment{spel#1}{0{+b}{
278     \<<<[arealink]{
279       \begin{#1}[##1]
280         ##2
281       \end{#1}
282     }\hspace*{-0.75ex}%
283   }{}
284 }
285 \newcommand\spelwrapenvironment@mb[1]{
286   \NewDocumentEnvironment{spel#1}{m+b}{
287     \<<<[arealink]{
288       \begin{#1}{##1}
289         ##2
290       \end{#1}
291     }\hspace*{-0.75ex}%
292   }{}
293 }
294 \newcommand\spelwrapenvironment@mob[1]{
295   \NewDocumentEnvironment{spel#1}{m0{+b}{
296     \<<<[arealink]{
297       \begin{#1}{##1}[##2]
298         ##3
299       \end{#1}
300     }\hspace*{-0.75ex}%
301   }{}
302 }
303 \newcommand\spelwrapenvironment@omb[1]{
304   \NewDocumentEnvironment{spel#1}{0{m+b}{
305     \<<<[arealink]{
306       \begin{#1}[##1][##2]
307         ##3
308       \end{#1}
309     }\hspace*{-0.75ex}%
310   }{}
311 }

```

Depending on the loading of amsmath, empheq and its overload option, we perform appropriate wrappings:

```

312 \AtBeginDocument{
313   \@ifpackageloaded{amsmath}{
314     \message{SpeLaTeX: detected amsmath package}
315     \spelmacpp{ensuremath}[1]{#1}
316     \@ifpackageloaded{empheq}{
317       \message{SpeLaTeX: detected package empheq}
318       \spelwrapenvironment@omb{empheq}}{}
319     \@ifpackagewith{empheq}{overload}{
320       \message{.....with overload option}
321       \spelwrapenvironment@ob{gather}
322       \spelwrapenvironment@ob{align}
323       \spelwrapenvironment@mob{alignat}
324     }
325   }

```

```

326     \message{.....without overload option}
327     \spelwrapenvironment@b{gather}
328     \spelwrapenvironment@b{align}
329     \spelwrapenvironment@mb{alignat}
330   }
331 }
332 {}
333 }

```

7.10 Generating speech chunks — explicitly ▷

7.10.1 Spel chunks to be parsed by spel-wizard.pl ▷

`spelchunk` (*env.*) The `spelchunk` environment is used to define explicit speech chunks.

```

334 \newlength\spel@mptbodywidth
335 \newsavebox\spel@mptbody
336 \savebox\spel@mptbody{%
337   \textcolor{spel@color@left}
338     {\quad\strut\tiny\raisebox{0.4ex}{\triangleright}\,}%
339 }
340 \newif\ifspel@chunkarealink
341 \define@key{spelchunk}{arealink}[]{\spel@chunkarealinktrue}
342 \ifspel@disabled
343   \def\spelchunk{\@ifnextchar[{\spel@optdisabled}{spel@intdisabled}}%
344 \else
345   \def\spelchunk{%
346     \catcode\^^M=\active%
347     \stepcounter{spel@chunk}%
348     \spel@idxwrite{chunk}{\spel@optpart\thesubparagraph-\thespel@chunk}%
349     \@ifnextchar[{\catcode\^^M=5\spel@opt}{\catcode\^^M=5\spel@int}}%
350 \fi
351 \ifspel@disabled\def\endspelchunk{}\else
352 \def\endspelchunk{
353   \end{VerbatimOut}
354   \catcode\^^M=5\relax%
355   \ifspel@chunkarealink%
356     \href{\linksdir/\spel@optpart\thesubparagraph-\thespel@chunk.\spel@format}
357       {\input{./\chunkdir/\spel@optpart\thesubparagraph-\thespel@chunk}}%
358   \else%
359     \settowidth\spel@mptbodywidth{\usebox\spel@mptbody}%
360     \hspace*{-\spel@mptbodywidth}%
361     \href{\linksdir/\spel@optpart\thesubparagraph-\thespel@chunk.\spel@format}
362       {\usebox\spel@mptbody}%
363     \input{./\chunkdir/\spel@optpart\thesubparagraph-\thespel@chunk}%
364   \fi%
365   \spel@chunkarealinkfalse%
366 }%
367 \fi

```

The environment above checks if it is called with optional arguments or not.

`\spelchunk@opt` This is macro that deals with the optional arguments of the `spelchunk` environment.

```

368 \def\spelchunk@opt[#1]{\setkeys{spelchunk}{#1}\spel@int}
369 \def\spelchunk@optdisabled[#1]{\setkeys{spelchunk}{#1}\spel@intdisabled}

```

`\spelchunk@int` This is an internal macro to start the `VerbatimOut` environment embedded in

the `spelchunk` environment.

```
370 \def\spelchunk@int{%
371   \VerbatimEnvironment
372   \begin{VerbatimOut}{\chunkdir/\spel@@optpart\thesubparagraph-\thespel@chunk.tex}}
373 \def\spelchunk@intdisabled{}

374 \NewDocumentCommand{\spelchunkatom}{0{}+m}{%
375   \ifspel@disabled #2\else%
376   \stepcounter{spel@chunk}%
377   \spel@idxwrite{chunk}{\spel@@optpart\thesubparagraph-\thespel@chunk}%
378   \setkeys{spelchunk}{#1}%
379   \makeatletter%
380   \scantokens{%
381 \begin{spelverbatimwrite}{\chunkdir/\spel@@optpart\thesubparagraph-\thespel@chunk.tex}
382 #2
383 \end{spelverbatimwrite}
384 }%
385 \makeatother
386 \ifspel@chunkarealink%
387   \href{\linksdir/\spel@@optpart\thesubparagraph-\thespel@chunk.\spel@format}
388     {\input{./\chunkdir/\spel@@optpart\thesubparagraph-\thespel@chunk}}%
389 \else%
390   \settowidth\spel@mpboxwidth{\usebox\spel@mpbox}%
391   \hspace*{-\spel@mpboxwidth}%
392   \href{\linksdir/\spel@@optpart\thesubparagraph-\thespel@chunk.\spel@format}
393     {\usebox\spel@mpbox}\input{./\chunkdir/\spel@@optpart\thesubparagraph-
\thespel@chunk}%
394 \fi%
395 \spel@chunkarealinkfalse%
396 \fi%
397 }
398
399 \def\spelverbatimwrite#1{%
400   \@bsphack%
401   \openoutputfile{#1}{chunk}%
402   \def\verbatim@processline{\addtostream{chunk}{\the\verbatim@line}}%
403   \let\do\@makeoother\dospecials
404   \catcode`\^^M\active \catcode`\^^I=12
405   \verbatim@start}%
406 \def\endspelverbatimwrite{
407   \verbatim@finish
408   \closeoutputstream{chunk}
409   \@esphack
410 }
411 \def\<<<{\spelchunkatom}
```

7.10.2 Explicit spelchunks ▷

`spelchunkad` (*env.*) The `spelchunkad` environment is used to override a previous speech chunk. In this way you can provide your own text.

```
412 \def\spelchunkad{%
413   \catcode`\^^M=\active
414   \@ifnextchar[{\catcode`\^^M=5\spelchunk@opt}{\catcode`\^^M=5\spelchunk@int}}
415 \def\endspelchunkad{%
416   \end{VerbatimOut}
417   \catcode`\^^M=5\relax
418 }

419 \AtBeginDocument{
```

```
420 \newcommand\spel@optpart{}
421 }
```

7.11 Helping the wizard to read our chunks ▷

7.11.1 Listing macros that are to be preprocessed ▷

`\spelmacpp` Some \LaTeX or \TeX commands are only for layout purposes and are totally not content related. They do not contribute to what must be read. On the contrary, they make it hard for the `spel-wizard.pl` parser to convert the texts flawlessly to what can be read by the text-to-speech engines. Examples of these layout-only commands are `\sf`, `\it`, `\tt`, `\bf` and `\displaystyle` that are to be discarded, but also macro's like e.g. `\fbox` for which only the content is to be retained.

As you might also make your own macros that are pure typesetting oriented, it makes sense to provide a macro that registers them as pure type-setting macros and use that macro to cover the examples mentioned above. The command takes four arguments of which the two middle ones are optional:

1. The name of the macro without leading backslash
2. The number of arguments of the macro (omit if no arguments, because this is the default value)
3. The value of the optional first argument (if any, otherwise omit)
4. The replacement text, using parameter references `#1`, `#2`, a.s.o. as stamps for where the arguments need to be inserted.

```
422 \ExplSyntaxOn
423 \NewDocumentCommand{\spelmacpp}{moom}
424 {
425   \addtostream{spelidx}{macpp|#1|#2|#3|#4}
426 }
427 \ExplSyntaxOff
```

Now let's register some standard macros that are to be ignored.

```
428 \spelmacpp{sf}{}
429 \spelmacpp{it}{}
430 \spelmacpp{tt}{}
431 \spelmacpp{bf}{}
432 \spelmacpp{HUGE}{}
433 \spelmacpp{Huge}{}
434 \spelmacpp{huge}{}
435 \spelmacpp{LARGE}{}
436 \spelmacpp{Large}{}
437 \spelmacpp{large}{}
438 \spelmacpp{normalsize}{}
439 \spelmacpp{small}{}
440 \spelmacpp{footnotesize}{}
441 \spelmacpp{scriptsize}{}
442 \spelmacpp{tiny}{}
443 \spelmacpp{minuscule}{}
444 \spelmacpp{textsf}[1]{#1}
445 \spelmacpp{textit}[1]{#1}
446 \spelmacpp{texttt}[1]{#1}
```

```

447 \spelmacpp{textbf}[1]{#1}
448 \spelmacpp{mathbb}[1]{#1}
449 \spelmacpp{mathcal}[1]{#1}
450 \spelmacpp{url}[1]{#1}
451 \spelmacpp{phantom}[1]{}
452 \spelmacpp{quad}{}
453 \spelmacpp{qqquad}{}
454 \spelmacpp{displaystyle}{}
455 \spelmacpp{relax}{}
456 \spelmacpp{strut}{}
457 \spelmacpp{mathstrut}{}
458 \spelmacpp{label}[1]{}

```

And let's register a macro for which only the contents is to be preserved:

```
459 \spelmacpp{fbox}[1]{#1}
```

7.11.2 Listing environments that are to be ignored ▷

`\spelenvpp` Some L^AT_EX or T_EX environments are only for layout purposes and are totally not content related. They do not contribute to what must be read. On the contrary, they make it hard for the `spel-wizard.pl` parser to convert the texts flawlessly to what can be read by the text-to-speech engines. An examples of such a layout-only environment is the `center` environment.

As you might also make your own environments that are pure typesetting oriented, it makes sense to provide a macro that registers them as pure type-setting macros and use that macro to cover the examples mentioned above.

The command takes four arguments of wich the two middle ones are optional:

1. The name of the environment
2. The number of arguments of the environments (omit if no arguments, because this is the default value)
3. The value of the optional first argument (if any, otherwise omit)
4. The replacement text, using parameter references `#1`, `#2`, a.s.o. as stamps for where the arguments need to be inserted. The highest parameter number (one higher than the number of arguments) is for the body of the environment.

```

460 \ExplSyntaxOn
461 \NewDocumentCommand{\spelenvpp}{moom}
462 {
463   \addtostream{spelidx}{envpp|#1|#2|#3|#4}
464 }
465 \ExplSyntaxOff

```

Now let's register some standard macros that are to be ignored:

```
466 \spelenvpp{center}{#1}
```

7.11.3 Audio descriptions for typesetting macros ▷

`\spelmacad` This macro allows specifying how to treat macros (with arguments) that appear in the chunks to read out loud. The arguments are in order:

1. (mandatory) name of the macro (without leading backslash)
2. (optional) number of arguments of the macro
3. (optional) default for optional (first) argument
4. (mandatory) text to read (with macro parameters in them) You can use the special syntax `@{i18n(keyword,#1,#2)}` to trigger a call to the internationalization (i18n) features built in the `spel-wizard.pl` script. This will help to read your commands in an appropriate way. If you miss some features in the i18n list of `spel-wizard.pl`, please contact the author to help you out. If you are fluent in Perl, you might also want to change the i18n list of `spel-wizard.pl` yourself. It's not that hard.

```
467 \ExplSyntaxOn
468 \NewDocumentCommand{\spelmacad}{moom}
469 {
470   \addtostream{spelidx}{macad|#1|#2|#3|#4}
471 }
472 \ExplSyntaxOff
```

We immediately provide some standard constructs, which are to be ignored:

```
473 \spelmacad{spelatex}{spee-lay-tech}
474 \spelmacad{spelpl}{spel wizzard dot pl}
475 \spelmacad{LaTeX}{lay-tech}
476 \spelmacad{LuaLaTeX}{lua lay-tech}
477 \spelmacad{TeX}{tech}
478 \spelmacpp{textsf}[1]{#1}
479 \spelmacpp{texttt}[1]{#1}
480 \spelmacpp{textit}[1]{#1}
481 \spelmacpp{mathit}[1]{\string\text{#1}}
482 \spelmacpp{emph}[1]{#1}
483 \spelmacpp{underline}[1]{#1}
484 \spelmacad{mbox}[1]{#1}
485 \spelmacad{text}[1]{#1}
486 \spelmacpp{nobreakspace}{#1}
487 \spelmacpp{textasciitilde}[1]{ }
488 \spelmacad{textbackslash}{backslash}
489 \spelmacad{textsuperscript}[1]{#1}
490 \spelmacad{footnote}[1]{ }
491 \spelmacad{pm}{@{i18n(plusminus)}}
492 \spelmacad{ldots}{...}
```

Some more that don't seem ignorable - and they are not indeed - they are treated differently by `spel-wizard.pl`. However, by registering them here, `spel-wizard.pl` knows there signature:

```
493 \spelmacad{cite}[1]{ }
494 \spelmacad{ref}[1]{ }
495 \spelmacad{pageref}[1]{ }
```

7.11.4 Audio descriptions for typesetting environments ▷

`\spelenvad` This macro allows specifying how to treat environments (with arguments) that appear in the chunks to read out loud. The arguments are in order:

1. (mandatory) name of the macro (without leading backslash)
2. (optional) number of arguments of the macro
3. (optional) default for optional (first) argument
4. (mandatory) text to read (with macro parameters in them)

```
496 \ExplSyntaxOn
497 \NewDocumentCommand{\spelenvad}{moomm}
498 {
499   \addtostream{spelidx}{envad|#1|#2|#3|#4|#5}
500 }
501 \ExplSyntaxOff
```

We immediately provide some standard constructs, which are to be ignored:

```
502 \spelenvad{center}{}{}
```

7.11.5 Inline descriptions for nesting ▷

`\spelinlad` This macro incorporates the first argument in the text file, but sends the replacement using a macro preprocessing instruction to the wizard.

```
503 \ExplSyntaxOn
504 \NewDocumentCommand{\spelinlad}{mm}{#1}
505 \spelmacpp{spelinlad}[2]{#2}
506 \ExplSyntaxOff
```

7.12 Extra math commands ▷

The commands are only loaded if the package option `extramath` is provided:

```
507 \ifspel@extramath
```

`\setenum` This macro typesets a set defined by enumeration:

```
508 \DeclareRobustCommand{\setenum}[1]{\left\{#1\right\}}
509 \spelmacad{setenum}[1]{@{i18n(Setenum,#1)}}
```

`\setdesc` This macro typesets a set defined by description:

```
510 \DeclareRobustCommand{\setdesc}[1]{\left\{#1\right\}}
511 \spelmacad{setdesc}[1]{@{i18n(Setdesc,#1)}}
```

Note that these two macro's are identical! However, the fact that they have a different name is of great value to `spel-wizard.pl`.

`\unitof` This macro typesets its argument between square brackets, meaning 'the unit of'. The corresponding audiodescription takes care of proper reading out loud this construct.

```
512 \DeclareRobustCommand{\unitof}[1]{\left[#1\right]}
513 \spelmacad{unitof}[1]{@{i18n(Unitof,#1)}}
```

The conditional loading ends here:

```
514 \fi
```

8 TODO ▷

As long as there are things on our todo list, we have a reason to live.

- provide enable/disable switch to disable certain ranges in text, e.g. the implementation range in this document
- enable bibliography and citation stuff

References

- [1] NVDA from NV Access, empowering lives through non-visual access to technology <https://www.nvaccess.org> online, accessed in June 2024.
- [2] SprintPlus, helping people with dyslexia <https://www.sprintplus.be/en> online, accessed in June 2024.
- [3] Adobe Reader, a PDF reader from Adobe. <https://get.adobe.com/> online, accessed in May 2024.
- [4] TagPDF - Tools for experimenting with tagging using pdfLaTeX and LuaLaTeX. <https://ctan.org/pkg/tagpdf> online, accessed in June 2024.
- [5] Wine - Wine Is Not an Emulator - running windows applications on POSIX-compliant systems. <https://www.winehq.org> online, accessed in June 2024.
- [6] SpeL — Speech-enabled L^AT_EX. <https://ctan.org/pkg/spel> online, accessed in June 2024.
- [7] SpeL::Wizard — Incantating L^AT_EX into natural lanuage <https://metacpan.org/pod/SpeL::Wizard> online, accessed in June 2024.
- [8] The Festival TTS-program. <http://www.cstr.ed.ac.uk/projects/festival/> online, accessed in May 2024.
- [9] The Balabolka TTS-program. <http://www.cross-plus-a.com/balabolka.htm> online, accessed in May 2024.
- [10] FreeTTS — A speech synthesizer in Java. <https://freetts.sourceforge.io/docs/index.php> online, accessed in May 2024.

- [11] Amazon Polly — An online text-to-speech engine. <https://aws.amazon.com/polly> online, accessed in May 2024.
- [12] The Comprehensive T_EX Archive Network. <http://www.ctan.org>. online, accessed in May 2024.
- [13] The Comprehensive Perl Archive Network. <http://www.cpan.org>. online, accessed in May 2024.
- [14] xpdf, a simple and very fast PDF reader on GNU/Linux. <http://www.xpdfreader.com/>. online, accessed in May 2024.
- [15] evince, a PDF reader, part of the Gnome environment. <https://help.gnome.org/users/evince/stable/>. online, accessed in May 2024.
- [16] okular, a PDF reader, part of the KDE environment. <https://okular.kde.org>. online, accessed in May 2024.

Change History

<p>v0.90</p> <p>General: . Birth 1</p> <p>v0.91</p> <p>General: . First overhaul:</p> <ul style="list-style-type: none"> - avoided big active link areas - sketched bigger picture, leading to the three project phases. 1 <p>v0.92</p> <p>General: . Second overhaul:</p> <ul style="list-style-type: none"> - dumped orgmode export idea (too small of an audience) - introduced markers for non-area-links - implemented audio on server - implemented <<<-macro as a 	<p>shorthand 1</p> <p>v0.93</p> <p>General: . Major overhaul:</p> <ul style="list-style-type: none"> - improvements to allow for TeX-ing of full course of Walter - introduced shorthand macro \«< - switching between math and text mode fixed 1 <p>v0.94</p> <p>General: . Bug fixes for TUGboat article - removed all 'dropped character warnings' - the logo now has a hyphenation point - increased font size of documentation 1</p>
---	---

Index

Numbers written in *italic* refer to the page where the corresponding entry is described; numbers underlined refer to the code line of the definition; numbers in *roman* refer to the code lines where the entry is used.

Symbols			
<ul style="list-style-type: none"> \, 338 \- 25 \< 269, 278, 287, 296, 305, 411 \@arabic 58, 67, 75, 78, 81, 161 \@bsphack 400 	<ul style="list-style-type: none"> \@chapter <u>156</u> \@esphack 409 \@footnotetext <u>220</u> \@ifclassloaded 129 \@ifnextchar 235, 343, 349, 414 \@ifpackageloaded 313, 316 	<ul style="list-style-type: none"> \@ifpackagewith 319 \@makeother 403 \@mkboth 130 \@part <u>136</u> \@restonecolfalse 127 \@restonecoltrue 125 \@schapter <u>176</u> \@sect <u>190</u>, <u>208</u> 	

<code>\@spart</code>	145	<code>\def</code> .	138, 147, 166, 179, 192, 202, 210, 222, 238, 239, 247, 343, 345, 351, 352, 368, 369, 370, 373, 399, 402, 406, 411, 412, 415	H	<code>\hfill</code>	199
<code>\@ssect</code>	209, 210	<code>\define@key</code>	341	<code>\href</code> .	105, 117, 118, 120, 140, 151, 170, 184, 199, 200, 214, 227, 245, 253, 263, 356, 361, 387, 392	
<code>\@starttoc</code>	132	<code>\definecolor</code>	86	<code>\hspace</code>	226, 244, 252, 273, 282, 291, 300, 309, 360, 391	
<code>\@undefined</code> ...	60, 62, 70, 159, 164, 177	<code>\do</code>	403	<code>\hypersetup</code>	4	
<code>\{</code>	508, 510	<code>\dospecials</code>	403	I		
<code>\}</code>	508, 510	E		<code>\if@restonecol</code> ...	133	
<code>\^</code> ...	346, 349, 354, 404, 413, 414, 417	<code>\else</code> .	44, 50, 61, 64, 72, 100, 114, 126, 136, 145, 158, 159, 161, 164, 176, 177, 190, 203, 208, 220, 233, 257, 344, 351, 358, 375, 389	<code>\if@twocolumn</code>	124	
A		<code>\EnableBabelHook</code> ..	84	<code>\ifnum</code>	194, 203	
<code>\active</code> ..	346, 404, 413	<code>\end</code>	272, 281, 290, 299, 308, 353, 383, 416	<code>\ifspel@chunkarealink</code>	340, 355, 386	
<code>\AddBabelHook</code>	83	<code>\endcsname</code> 102, 103, 105, 203	<code>\ifspel@disabled</code> 44, 50, 100, 114, 136, 145, 158, 176, 190, 208, 220, 233, 255, 342, 351, 375	
<code>\addcontentsline</code> 115, 116	<code>\endinput</code>	406	<code>\ifspel@extramath</code>	507	
<code>\addtostream</code> 35, 36, 37, 38, 47, 53, 402, 425, 463, 470, 499	<code>\endinput</code>	406	<code>\ifspel@inschapter</code>	156, 161	
<code>\AtBeginDocument</code> 3, 312, 419	<code>\endinput</code>	406	<code>\ifx</code>	60, 62, 70, 159, 164, 177	
<code>\AtEndDocument</code>	30	<code>\endinput</code>	406	<code>\input</code>	357, 363, 388, 393	
<code>\audiodir</code> 33, 36, 41, 52		<code>\endinput</code>	406	<code>\item</code>	233, 244, 252	
B		<code>\endinput</code>	406	J		
<code>\begin</code> 270, 279, 288, 297, 306, 372, 381		<code>\endinput</code>	406	<code>\jobname</code>	29, 33, 34	
C		<code>\endinput</code>	406	K		
<code>\c@chapter</code> . 60, 70, 161		<code>\endinput</code>	406	<code>\kern</code>	25	
<code>\c@part</code>	62	<code>\endinput</code>	406	L		
<code>\c@secnumdepth</code> 194, 203		<code>\endinput</code>	406	<code>\language</code> ..	83, 110	
<code>\c@spel@chunk</code>	81	<code>\endinput</code>	406	<code>\LaTeX</code>	25	
<code>\c@spel@footnote</code> ..	78	<code>\endinput</code>	406	<code>\left</code>	508, 510, 512	
<code>\c@spel@schapter</code> ..	67	<code>\endinput</code>	406	<code>\let</code>	102, 115, 117, 120, 137, 146, 165, 178, 191, 209, 221, 403	
<code>\c@spel@spart</code>	58	<code>\endinput</code>	406	<code>\linksdir</code>	40, 105, 140, 151, 170, 184, 199, 200, 214, 227, 245, 253, 263, 356, 361, 387, 392	
<code>\c@spel@ssect</code>	75	<code>\endinput</code>	406	<code>\long</code>	222	
<code>\caption</code>	256, 262	<code>\endinput</code>	406	M		
<code>\catcode</code> 346, 349, 354, 404, 413, 414, 417		<code>\endinput</code>	406	<code>\makeatletter</code>	379	
<code>\chapter</code> . 129, 164, 177		<code>\endinput</code>	406	<code>\makeatother</code>	385	
<code>\chunkdir</code>	34, 37, 357, 363, 372, 381, 388, 393	<code>\endinput</code>	406	<code>\MakeUppercase</code> ...	131	
<code>\closeoutputstream</code>	31, 54, 408	<code>\endinput</code>	406			
<code>\colorlet</code>	88, 89, 92, 93, 96, 97	F				
<code>\contentsname</code> . 129, 131		<code>\fi</code> ..	49, 56, 66, 69, 74, 109, 128, 133, 135, 144, 155, 161, 163, 174, 175, 188, 189, 196, 203, 207, 219, 232, 237, 266, 350, 364, 367, 394, 396, 514			
<code>\csname</code> 102, 103, 105, 203		G				
D		<code>\gdef</code>	103			
<code>\DeclareBoolOption</code>	22, 23					
<code>\DeclareRobustCommand</code> 25, 26, 508, 510, 512						
<code>\DeclareStringOption</code>	19, 20, 21					

<code>\message</code>	<code>\spel@@chapter</code> 165, 169	<code>\spel@mptbodywidth</code> .
. 314, 317, 320, 326	<code>\spel@@fntext</code> . 221, 225 224,
N	<code>\spel@@href</code> .. 117, 120	226, 241, 244,
<code>\newcounter</code> . . . 57,	<code>\spel@@label</code> . 202, 204	249, 252, 334,
63, 65, 71, 73, 77, 80	<code>\spel@@optpart</code> . 140,	359, 360, 390, 391
<code>\NewDocumentCommand</code>	141, 142, 151,	<code>\spel@registrelement</code>
. 374, 423,	152, 153, 170,	. <u>100</u> , 111, 112, 113
461, 468, 497, 504	171, 172, 184,	<code>\spel@schapter</code> <u>60</u>
<code>\NewDocumentEnvironment</code>	185, 186, 199,	<code>\spel@server</code> . . . 38, 41
. 268,	200, 204, 205,	<code>\spel@spart</code> <u>57</u>
277, 286, 295, 304	214, 216, 217,	<code>\spel@ssect</code> <u>70</u>
<code>\newif</code> 156, 340	242, 243, 245,	<code>\spelatex</code> <u>25</u>
<code>\newlength</code> 334	250, 251, 253,	<code>\spelcaption</code> <u>255</u>
<code>\newoutputstream</code> 27, 28	260, 261, 263,	<code>\spelchunk</code> . . . 343, 345
<code>\newsavebox</code> 335	348, 356, 357,	<code>spelchunk (env.)</code> .. <u>334</u>
O	361, 363, 372,	<code>\spelchunk@int</code>
<code>\onecolumn</code> 125	377, 381, 387,	. 349, 368, <u>370</u> , 414
<code>\openoutputfile</code> . . .	388, 392, 393, 420	<code>\spelchunk@intdisabled</code>
. 29, 52, 401	<code>\spel@@part</code> .. 137, 140 369, 373
P	<code>\spel@@schapter</code> 178, 183	<code>\spelchunk@opt</code>
<code>\ProcessKeyvalOptions</code>	<code>\spel@@sect</code> .. 191, 198 349, <u>368</u> , 414
. 24	<code>\spel@@spart</code> . 146, 150	<code>\spelchunk@optdisabled</code>
<code>\protect</code> 263	<code>\spel@@ssect</code> . 209, 213 343, 369
<code>\providecommand</code> .. 122	<code>\spel@chunk</code> <u>80</u>	<code>\spelchunkad</code> 412
Q	<code>\spel@chunkarealinkfalse</code>	<code>spelchunkad (env.)</code> . <u>412</u>
<code>\quad</code> 338 365, 395	<code>\spelchunkatom</code> 374, 411
R	<code>\spel@chunkarealinktrue</code>	<code>\spelenvad</code> . . . <u>496</u> , 502
<code>\raisebox</code> 25, 338 341	<code>\spelenvpp</code> . . . <u>460</u> , 466
<code>\relax</code> 354, 417	<code>\spel@chunkwrite</code> ..	<code>\spelinlad</code> <u>503</u>
<code>\renewcommand</code> .. 58, <u>50</u> , 104,	<code>\spelitem</code> <u>233</u>
67, 75, 78, 81,	142, 153, 172,	<code>\spelitem@intone</code> ..
116, 118, 123, 160	186, 205, 217, 235, 239
<code>\RequirePackage</code> . . .	230, 243, 251, 261	<code>\spelitem@inttwo</code> ..
. . . 1, 2, 6, 7, 8,	<code>\spel@footnote</code> <u>77</u> 238, <u>247</u>
9, 10, 11, 12, 13, 14	<code>\spel@format</code>	<code>\spelitem@opt</code>
<code>\right</code> . . . 508, 510, 512	. . . 35, 105, 140, 235, <u>238</u> , <u>239</u>
<code>\rotatebox</code> 25	151, 170, 184,	<code>\spelmacad</code>
S	199, 214, 227,	. <u>467</u> , 473, 474,
<code>\savebox</code> 336	245, 253, 263,	475, 476, 477,
<code>\scantokens</code> 380	356, 361, 387, 392	484, 485, 488,
<code>\section</code> 129	<code>\spel@idxwrite</code>	489, 490, 491,
<code>\setcounter</code> <u>44</u> , 83, 106,	492, 493, 494,
. 59, 68, 76,	110, 141, 152,	495, 509, 511, 513
79, 82, 139, 149,	171, 185, 204,	<code>\spelmacpp</code>
168, 182, 197, 212	216, 229, 242,	. 315, <u>422</u> , 428,
<code>\setdesc</code> <u>510</u>	250, 260, 348, 377	429, 430, 431,
<code>\setenum</code> <u>508</u>	<code>\spel@inschapterfalse</code>	432, 433, 434,
<code>\setkeys</code> . 368, 369, 378 157, 167	435, 436, 437,
<code>\settowidth</code> . . . 224,	<code>\spel@inschaptertrue</code>	438, 439, 440,
241, 249, 359, 390 180	441, 442, 443,
<code>\SetupKeyvalOptions</code> 15	<code>\spel@markervisibility</code>	444, 445, 446,
<code>\spel@addcontentsline</code> 87, 91, 95	447, 448, 449,
. 115, 119	<code>\spel@mptbody</code>	450, 451, 452,
 224, 228,	453, 454, 455,
	241, 246, 249,	456, 457, 458,
	254, 335, 336,	459, 478, 479,
	359, 362, 390, 393	480, 481, 482,
		483, 486, 487, 505

<code>\spelpl</code>	26	<code>\textcolor</code> ...	201, 337	217, 242, 243,
<code>\spelverbatimwrite</code>	399	<code>\texttt</code>	26	245, 250, 251,
<code>spelwrapenvironment</code>		<code>\the</code>	402	253, 260, 261,
(env.)	267	<code>\thechapter</code> ...	159,	263, 348, 356,
<code>\spelwrapenvironment@b</code>		160, 170, 171, 172		357, 361, 363,
....	267, 327, 328	<code>\thepart</code>	141	372, 377, 381,
<code>\spelwrapenvironment@mb</code>		<code>\thespel@chunk</code>		387, 388, 392, 393
.....	285, 329	..	81, 242, 243,	<code>\tiny</code>
<code>\spelwrapenvironment@mob</code>		245, 250, 251,		338
.....	294, 323	253, 260, 261,		<code>\triangleright</code> 201, 338
<code>\spelwrapenvironment@ob</code>		263, 348, 356,		<code>\twocolumn</code>
....	276, 321, 322	357, 361, 363,		46
<code>\spelwrapenvironment@omb</code>		372, 377, 381,		
.....	303, 318	387, 388, 392, 393		U
<code>\stepcounter</code>		<code>\thespel@footnote</code> .		<code>\unitof</code>
.	148, 181, 195,	..	78, 227, 229, 230	512
211, 223, 240,		<code>\thespel@schapter</code> .		<code>\usebox</code> 224, 228, 241,
248, 259, 347, 376		67,	246, 249, 254,
<code>\str</code>	41, 87, 91, 95	161, 184, 185, 186		359, 362, 390, 393
<code>\string</code>	481	<code>\thespel@spart</code>		V
<code>\strut</code>	338	..	58, 151, 152, 153	<code>\verbatim@finish</code> .
		<code>\thespel@ssect</code>		407
		..	75, 214, 216, 217	<code>\verbatim@line</code> ...
		<code>\thesubparagraph</code> ..		402
		.	199, 200, 204,	<code>\verbatim@start</code> ..
		205, 214, 216,		405
				<code>\VerbatimEnvironment</code>
			
				371